

K-series super thin section ball bearings

JTEKT K-series super thin section ball bearings were developed to meet current engineering needs for thinner, lighter bearings. They are used extensively in automation and labor saving equipment, such as industrial robots.

These bearings are sorted into nine dimension series according to cross-sectional area.

Those of the same dimension series have an equivalent cross-sectional area irrespective of the bore diameter.

They are available in three types that differ in structure.

■ Deep groove type

Carries radial load, axial load in both directions, and combined loads.

■ Angular contact type

Has a 30° contact angle, and carries radial load and axial load in one direction.

Two bearings are usually used together facing one another.

■ Four-point contact type

Has a contact angle of 30° both to the right and to the left.

Able to carry axial load in both directions. Also able to support moment and radial loads.



| Dimension series code | Cross-sectional dimension $B = E$ (mm) | Bearing type code | | | Bore diameter (mm) |
|-----------------------|--|-------------------------|-----------------------------|--------------------------------|-----------------------|
| | | C (Deep groove type) | A (Angular contact type) | X (Four-point contact type) | |
| | | | | | |
| T | 4.762 | KTC | KTA | KTX | 25.4 to 38.1 |
| A | 6.35 | KAC | KAA | KAX | 50.8 to 304.8 |
| B | 7.938 | KBC | KBA | KBX | 50.8 to 508 |
| C | 9.525 | KCC | KCA | KCX | 101.6 to 762 |
| D | 12.7 | KDC | KDA | KDX | |
| F | 19.05 | KFC | KFA | KFX | 101.6 to 1016 |
| G | 25.4 | KGC | KGA | KGX | |
| J | $B = 11.1$ $E = 9.525$ | - | KJA...RD | - | 101.6 to 304.8 |
| U | $B = 12.7$ $E = 9.525$ | KUC...2RD | - | KUX...2RD | |

Table 1 K-series super thin section ball bearings : tolerance


| Bore diameter number | Single plane mean bore diameter deviation | | | | | Single plane mean outside diameter deviation | | | | | Single inner (outer) ring width deviation | | | Radial runout of assembled bearing ring, max. | | | | | | | | | | Assembled bearing ring face runout with raceway, max. | | | | Bore diameter number |
|----------------------|---|---------|----------|----------|----------|--|---------|----------|----------|----------|---|----------------|----------|---|----------|----------------|----------------|----------|---------------------|----------------|----------------|----------------|------------------------|---|------------------------|---------------------|--|----------------------|
| | Δd_{mp} | | | | | ΔD_{mp} | | | | | $\Delta B_s, \Delta C_s$ | | | Inner ring K_{ia} | | | | | Outer ring K_{ea} | | | | | Inner ring S_{ia} | | Outer ring S_{ea} | | |
| | classes K0, K1, K2 | | class K3 | class K4 | class K6 | classes K0, K1, K2 | | class K3 | class K4 | class K6 | classes K0, K1, K2 | classes K3, K4 | class K6 | class K0 | class K3 | classes K1, K4 | classes K2, K6 | class K0 | class K3 | classes K1, K4 | classes K2, K6 | classes K1, K4 | classes K0, K2, K3, K6 | classes K1, K4 | classes K0, K2, K3, K6 | | | |
| | div. I | div. II | | | | div. I | div. II | | | | | | | div. I | div. II | | | | | | | | | | | | | |
| 010 | 0 | -10 | 0 | -5 | 0 | -4 | | | | | | | 13 | 8 | 8 | | | | | | | | | | 010 | | | |
| 015 | 0 | -13 | 0 | -8 | 0 | -5 | | | | | | | 15 | 10 | | | | | | | | | | | 015 | | | |
| 020 | | | | | | | | | | | | | | | | | | | | | | | | | 020 | | | |
| 025 | 0 | -15 | 0 | -10 | 0 | -5 | | | | | | | 20 | 13 | 10 | 5 | 4 | | | | | | | | 025 | | | |
| 030 | | | | | | | | | | | | | | | | | | | | | | | | | 030 | | | |
| 035 | | | | | | | | | | | | | | | | | | | | | | | | | 035 | | | |
| 040 | | | | | | | | | | | | | | | | | | | | | | | | | 040 | | | |
| 042 | 0 | -20 | 0 | -13 | 0 | -6 | | | | | | | 25 | | 13 | | | | | | | | | | 042 | | | |
| 045 | | | | | | | | | | | | | | | | | | | | | | | | | 045 | | | |
| 047 | | | | | | | | | | | | | | | | | | | | | | | | | 047 | | | |
| 050 | | | | | | | | | | | | | | | | | | | | | | | | | 050 | | | |
| 055 | | | | | | | | | | | | | | | | | | | | | | | | | 055 | | | |
| 060 | 0 | -25 | 0 | -15 | 0 | -10 | 0 | 0 | 0 | 0 | 0 | 0 | 30 | 25 | 15 | | | | | | | | | | 060 | | | |
| 065 | | | | | | | | | | | | | | | | | | | | | | | | | 065 | | | |
| 070 | | | | | | | | | | | | | | | | | | | | | | | | | 070 | | | |
| 075 | | | | | | | | | | | | | | | | | | | | | | | | | 075 | | | |
| 080 | 0 | -30 | 0 | -18 | 0 | -10 | 0 | 0 | 0 | 0 | 0 | 0 | 41 | 30 | 20 | 10 | | | | | | | | | 080 | | | |
| 090 | | | | | | | | | | | | | | | | | | | | | | | | | 090 | | | |
| 100 | | | | | | | | | | | | | | | | | | | | | | | | | 100 | | | |
| 110 | 0 | -36 | 0 | -20 | 0 | -13 | 0 | 0 | 0 | 0 | 0 | 0 | 46 | 36 | 25 | 13 | 10 | | | | | | | | 110 | | | |
| 120 | | | | | | | | | | | | | | | | | | | | | | | | | 120 | | | |
| 140 | 0 | -41 | 0 | -23 | 0 | -15 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | | | | | 140 | | | |
| 160 | | | | | | | | | | | | | | | | | | | | | | | | | 160 | | | |
| 180 | 0 | -46 | 0 | -23 | 0 | -15 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | | | | | 180 | | | |
| 200 | 0 | -51 | 0 | -25 | 0 | -18 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | | | | | 200 | | | |
| 250 | 0 | -76 | 0 | -46 | 0 | -46 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | | | | | 250 | | | |
| 300 | | | | | | | | | | | | | | | | | | | | | | | | | 300 | | | |
| 350 | 0 | -102 | 0 | -51 | 0 | -102 | 0 | 0 | 0 | 0 | 0 | 0 | | | | | | | | | | | | | 350 | | | |
| 400 | | | | | | | | | | | | | | | | | | | | | | | | | 400 | | | |

[Notes] Division I is for deep groove type ball bearings.
 Division II is for angular contact type and four-point contact type ball bearings.

Table 2 Standard radial internal clearance of deep groove and four-point contact type ball bearings Unit : μm

| Bore diameter number | Radial internal clearance | | | | |
|----------------------|---------------------------|-------------------------|----------|----------|----------|
| | classes K0, K1, K2 | | class K3 | class K4 | class K6 |
| | Deep groove type | Four-point contact type | | | |
| 010 | 25 – 41 | 25 – 38 | 18 – 28 | 13 – 23 | 10 – 20 |
| 015 | 30 – 46 | 30 – 43 | 20 – 30 | | 13 – 23 |
| 020 | 30 – 61 | 30 – 56 | 20 – 46 | 15 – 30 | 10 – 25 |
| 025 | | | | | 15 – 30 |
| 030 | | | | | |
| 035 | 41 – 71 | 41 – 66 | 25 – 51 | 20 – 36 | 15 – 30 |
| 040 | | | | | |
| 042 | | | | | |
| 045 | 51 – 86 | 51 – 76 | 30 – 56 | 20 – 36 | 20 – 36 |
| 050 | | | | | |
| 055 | | | | | |
| 060 | | | | | |
| 065 | | | | | |
| 070 | 61 – 107 | 61 – 86 | 36 – 61 | 25 – 41 | 25 – 41 |
| 075 | | | | | |
| 080 | | | | | |
| 090 | | | | | |
| 100 | 71 – 122 | 71 – 97 | 41 – 66 | 30 – 46 | 25 – 41 |
| 110 | | | | | |
| 120 | 81 – 132 | 91 – 117 | 46 – 71 | 36 – 51 | 30 – 46 |
| 140 | | | | | |
| 160 | | | | | |
| 180 | 102 – 152 | 91 – 117 | 61 – 86 | 36 – 56 | 30 – 46 |
| 200 | | | | | |
| 250 | 152 – 203 | 91 – 117 | 61 – 86 | 36 – 56 | 30 – 46 |
| 300 | | | | | |
| 350 | 203 – 254 | 102 – 127 | 61 – 86 | 36 – 56 | 30 – 46 |
| 400 | | | | | |

Table 3 Mounting dimensions

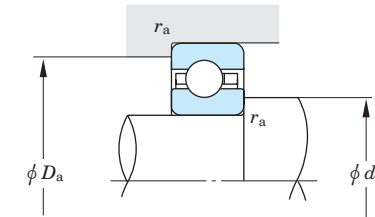

Unit : mm

| Dimension series | Bearing type | | | ϕd_a | | ϕD_a | | r_a |
|------------------|--------------|-----|-----|------------|------------|------------|------------|-------|
| | | | | max. | min. | min. | max. | max. |
| T | KTC | KTA | KTX | $d + 5.3$ | $d + 3.4$ | $d + 4.2$ | $d + 6.1$ | 0.2 |
| A | KAC | KAA | KAX | $d + 7.3$ | $d + 4.6$ | $d + 5.4$ | $d + 8.2$ | 0.4 |
| B | KBC | KBA | KBX | $d + 9.3$ | $d + 5.7$ | $d + 6.6$ | $d + 10.2$ | 0.8 |
| C | KCC | KCA | KCX | $d + 11.3$ | $d + 6.9$ | $d + 7.7$ | $d + 12.2$ | 0.8 |
| D | KDC | KDA | KDX | $d + 15.3$ | $d + 9.2$ | $d + 10.1$ | $d + 16.2$ | 1.3 |
| F | KFC | KFA | KFX | $d + 23.3$ | $d + 13.9$ | $d + 14.8$ | $d + 24.2$ | 1.8 |
| G | KGC | KGA | KGX | $d + 31.3$ | $d + 18.7$ | $d + 19.5$ | $d + 32.1$ | 1.8 |
| J | - | KJA | - | $d + 11.3$ | $d + 6.9$ | $d + 7.7$ | $d + 12.2$ | 0.2 |
| U | KUC | - | KUX | | | | | |


Table 4 Shaft diameter and housing bore diameter tolerance

| Bore diameter number | Inner ring rotation | | | | | | | | | | Outer ring rotation | | | | | | | | | | Bore diameter number |
|----------------------|--------------------------|----------|----------|----------|----------|---------------------------------|----------|----------|----------|----------|--------------------------|-----------|-----------|-----------|------------|---------------------------------|------------|------------|------------|------------|----------------------|
| | Shaft diameter tolerance | | | | | Housing bore diameter tolerance | | | | | Shaft diameter tolerance | | | | | Housing bore diameter tolerance | | | | | |
| | classes K0, K1, K2 | | class K3 | class K4 | class K6 | classes K0, K1, K2 | | class K3 | class K4 | class K6 | classes K0, K1, K2 | | class K3 | class K4 | class K6 | classes K0, K1, K2 | | class K3 | class K4 | class K6 | |
| | div. I | div. II | | | | div. I | div. II | | | | div. I | div. II | | | | div. I | div. II | | | | |
| 010 | +10 0 | | +5 0 | +5 0 | +4 0 | +13 0 | | +8 0 | +5 0 | | -10 -20 | -5 -10 | -5 -10 | -4 -8 | -13 -25 | | -8 -15 | -5 -10 | | | |
| 015 | +13 0 | | +8 0 | | | | +13 0 | | | +5 0 | | | | | | -13 -25 | | | | -5 -10 | |
| 020 | | | | | +5 0 | | | | | | | | | -5 -10 | | | | | | | |
| 025 | +15 0 | | +10 0 | | | | | | | | | | | | | | | | | | |
| 030 | | | | | | +15 0 | | +10 0 | +8 0 | | | | | | -15 -30 | | -10 -20 | -8 -15 | | | |
| 035 | | | | +8 0 | | | +15 0 | | | +8 0 | | | -8 -15 | | | -15 -30 | | | | -8 -15 | |
| 040 | +20 0 | | +13 0 | | +6 0 | | | | | | | | | -6 -13 | | | | | | | |
| 042 | | | | | | | | | | | | | | | | | | | | | |
| 045 | | | | | | +20 0 | | +13 0 | +10 0 | | | | | | | -20 -40 | | -13 -25 | -10 -20 | | |
| 047 | | | | | | | | | | | | | | | | | | | | | |
| 050 | | | | | | | | | | | | | | | | | | | | | |
| 055 | +25 0 | | +15 0 | +10 0 | +8 0 | | | | | +10 0 | | | | | | | | | | | |
| 060 | | | | | | +25 0 | | +15 0 | | | | | | | | -25 -50 | | -15 -30 | | -10 -20 | |
| 065 | | | | | | | | | | | | | | | | | | | | | |
| 070 | | | | | | | | | | | | | | | | | | | | | |
| 075 | | | | | | | | | +13 0 | | | | | | | | | | | | |
| 080 | +30 0 | | +18 0 | | +10 0 | | | +18 0 | | +13 0 | | | | | | | | | | | |
| 090 | | | | | | | | | | | | | | | | | | | | | |
| 100 | | | | +13 0 | | | | | | | | | | | | | | | | | |
| 110 | +35 0 | +35 0 | +20 0 | | +13 0 | +35 0 | +35 0 | +20 0 | | +13 0 | | | | | | -35 -70 | -35 -70 | -20 -40 | | -13 -25 | |
| 120 | | | | | | | | | | | | | | | | | | | | | |
| 140 | +40 0 | | | | | +40 0 | | +23 0 | +15 0 | +15 0 | | | | | | -40 -80 | | -23 -45 | -15 -30 | -15 -30 | |
| 160 | +45 0 | +40 0 | +23 0 | +15 0 | | +45 0 | +40 0 | +25 0 | +18 0 | | | | | | | -45 -90 | -40 -80 | -25 -50 | -18 -35 | | |
| 180 | | | | | | | | | | | | | | | | | | | | | |
| 200 | +50 0 | | +25 0 | +18 0 | | +50 0 | | +30 0 | +20 0 | | | | | | | -50 -100 | | -30 -60 | -18 -40 | | |
| 250 | +75 0 | +45 0 | | | | +75 0 | +45 0 | | | | | | | | | | | | | | |
| 300 | | | | | | | | | | | | | | | | | | | | | |
| 350 | +100 0 | +50 0 | | | | +100 0 | +50 0 | | | | | | | | | | | | | | |
| 400 | | | | | | | | | | | | | | | | | | | | | |

[Notes] Division I is for deep groove type ball bearings.
 Division II is for angular contact type and four-point contact type ball bearings.

K-series super thin section ball bearings
open type


d 25.4 ~ (114.3) mm

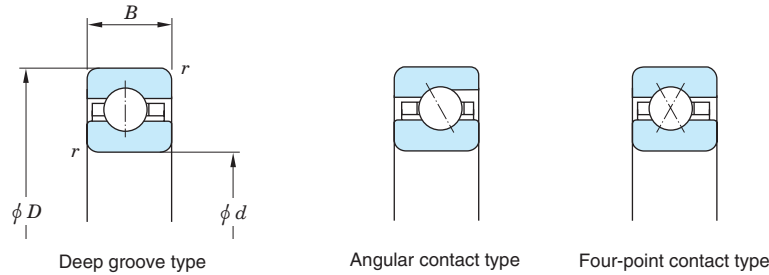

| Boundary dimensions (mm) | | | | Deep groove type | | | Angular contact type | | | | Four-point contact type | | | | (Refer.) Mass (kg) | | | | |
|--------------------------|----------------------------|------------------------|------------------|---|-------------------------|-----------------------|---|-------------------------|-----------------------|----------------------|-------------------------|---|----------------------|-----------------------|----------------------|-----------------------|-------------------------|-------------------------|-------------------------|
| <i>d</i> | <i>D</i> | <i>B</i> | <i>r</i> min. | Bearing No. | Basic load ratings (kN) | | Bearing No. | Basic load ratings (kN) | | | Bearing No. | Basic load ratings (kN) | | | Deep groove type | Angular contact type | Four-point contact type | | |
| | | | | | <i>C_r</i> | <i>C_{0r}</i> | | <i>C_r</i> | <i>C_{0r}</i> | <i>C_a</i> | <i>C_{0a}</i> | | <i>C_r</i> | <i>C_{0r}</i> | <i>C_a</i> | <i>C_{0a}</i> | | | |
| 25.4 | 34.925 | 4.762 | 0.4 | KTC010 | 2.50 | 1.95 | KTA010 | 2.65 | 2.20 | 3.45 | 6.70 | KTX010 | 2.15 | 1.65 | 3.70 | 7.15 | 0.012 | 0.011 | 0.012 |
| 38.1 | 47.625 | 4.762 | 0.4 | KTC015 | 2.90 | 2.70 | KTA015 | 3.05 | 3.10 | 4.00 | 9.35 | KTX015 | 2.50 | 2.30 | 4.20 | 10.5 | 0.018 | 0.017 | 0.018 |
| 50.8 | 63.5 66.675 | 6.35 7.938 | 0.6 1 | KAC020 KBC020 | 4.50 6.35 | 4.30 5.85 | KAA020 KBA020 | 4.75 6.75 | 4.95 6.70 | 6.25 8.90 | 14.9 20.4 | KAX020 KBX020 | 3.90 5.55 | 3.70 5.00 | 6.60 9.35 | 16.9 22.0 | 0.045 0.073 | 0.045 0.068 | 0.045 0.073 |
| 63.5 | 76.2 79.375 | 6.35 7.938 | 0.6 1 | KAC025 KBC025 | 4.85 6.90 | 5.20 7.00 | KAA025 KBA025 | 5.10 7.35 | 5.95 8.15 | 6.75 9.65 | 18.0 24.6 | KAX025 KBX025 | 4.20 6.00 | 4.45 6.00 | 7.05 10.0 | 20.9 27.3 | 0.059 0.086 | 0.054 0.086 | 0.059 0.086 |
| 76.2 | 88.9 92.075 | 6.35 7.938 | 0.6 1 | KAC030 KBC030 | 5.20 7.35 | 6.10 8.15 | KAA030 KBA030 | 5.45 7.70 | 7.00 9.35 | 7.15 10.2 | 21.2 28.3 | KAX030 KBX030 | 4.50 6.35 | 5.25 7.00 | 7.45 10.6 | 24.9 32.5 | 0.068 0.109 | 0.064 0.100 | 0.068 0.109 |
| 88.9 | 101.6 104.775 | 6.35 7.938 | 0.6 1 | KAC035 KBC035 | 5.45 7.75 | 7.00 9.30 | KAA035 KBA035 | 5.75 8.20 | 8.00 10.7 | 7.55 10.8 | 24.3 32.5 | KAX035 KBX035 | 4.75 6.70 | 6.00 8.00 | 7.80 11.1 | 29.0 37.8 | 0.082 0.122 | 0.077 0.122 | 0.082 0.122 |
| 101.6 | 114.3 117.475 120.65 | 6.35 7.938 9.525 | 0.6 1 1 | KAC040 KBC040 KCC040 | 5.75 8.10 10.3 | 7.85 10.5 12.4 | KAA040 KBA040 KCA040 | 6.00 8.60 11.2 | 9.05 12.1 14.9 | 7.90 11.3 14.7 | 27.4 36.8 45.1 | KAX040 KBX040 KCX040 | 4.95 7.05 8.95 | 6.80 9.00 10.6 | 8.10 11.6 14.8 | 33.0 43.1 50.0 | 0.086 0.136 0.204 | 0.086 0.136 0.200 | 0.086 0.136 0.204 |
| | 127 139.7 152.4 | 12.7 19.05 25.4 | 1.5 2 2 | KDC040 KFC040 KGC040 | 15.7 28.2 42.6 | 17.2 28.1 39.6 | KDA040 KFA040 KGA040 | 16.5 30.3 45.2 | 19.7 32.9 46.0 | 21.7 39.8 59.5 | 59.8 99.6 139 | KDX040 KFX040 KGX040 | 13.6 24.6 37.3 | 14.8 24.0 34.5 | 22.6 41.0 62.4 | 67.4 103 141 | 0.354 0.862 1.63 | 0.363 0.871 1.64 | 0.354 0.862 1.63 |
| 107.95 | 120.65 123.825 127 | 6.35 7.938 9.525 | 0.6 1 1 | KAC042 KBC042 KCC042 | 5.85 8.25 10.5 | 8.30 10.9 13.0 | KAA042 KBA042 KCA042 | 6.15 8.75 11.5 | 9.55 12.7 15.8 | 8.10 11.5 15.1 | 29.0 38.6 47.8 | KAX042 KBX042 KCX042 | 5.10 7.15 9.15 | 7.15 9.40 11.2 | 8.25 11.7 15.0 | 35.0 45.2 53.0 | 0.091 0.141 0.213 | 0.091 0.141 0.209 | 0.091 0.141 0.213 |
| | 133.35 146.05 158.75 | 12.7 19.05 25.4 | 1.5 2 2 | KDC042 KFC042 KGC042 | 15.8 28.8 42.2 | 17.8 29.4 39.9 | KDA042 KFA042 KGA042 | 16.8 30.6 46.2 | 20.8 34.0 48.0 | 22.1 40.3 60.8 | 62.9 103 146 | KDX042 KFX042 KGX042 | 13.7 25.1 36.9 | 15.3 25.2 34.3 | 22.8 41.8 61.8 | 70.2 109 142 | 0.376 0.907 1.72 | 0.381 0.925 1.74 | 0.376 0.907 1.72 |
| 114.3 | 127 130.175 133.35 | 6.35 7.938 9.525 | 0.6 1 1 | KAC045 KBC045 KCC045 | 6.00 8.45 10.7 | 8.75 11.6 13.7 | KAA045 KBA045 KCA045 | 6.25 8.90 11.7 | 10.1 13.3 16.6 | 8.25 11.7 15.4 | 30.5 40.4 50.4 | KAX045 KBX045 KCX045 | 5.20 7.35 9.30 | 7.55 10.0 11.8 | 8.40 12.0 15.3 | 37.0 48.3 56.1 | 0.100 0.150 0.218 | 0.095 0.154 0.222 | 0.100 0.150 0.218 |
| | 139.7 | 12.7 | 1.5 | KDC045 | 16.3 | 19.0 | KDA045 | 17.2 | 21.8 | 22.6 | 66.0 | KDX045 | 14.2 | 16.3 | 23.4 | 75.5 | 0.399 | 0.399 | 0.399 |

K-series super thin section ball bearings
open type


d (114.3) ~ (165.1) mm

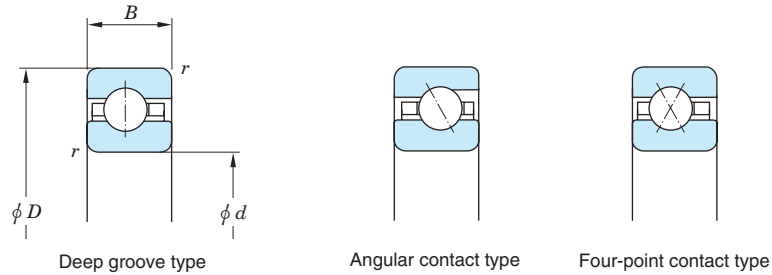

| Boundary dimensions (mm) | | | | Deep groove type | | | Angular contact type | | | | Four-point contact type | | | | (Refer.) Mass (kg) | | | | |
|--------------------------|----------|----------|------------------|------------------|-------------------------|-----------------------|----------------------|-------------------------|-----------------------|----------------------|-------------------------|-------------------------|----------------------|-----------------------|--------------------|----------------------|-------------------------|----------------------|-----------------------|
| <i>d</i> | <i>D</i> | <i>B</i> | <i>r</i> min. | Bearing No. | Basic load ratings (kN) | | Bearing No. | Basic load ratings (kN) | | | Bearing No. | Basic load ratings (kN) | | | Deep groove type | Angular contact type | Four-point contact type | | |
| | | | | | <i>C_r</i> | <i>C_{0r}</i> | | <i>C_r</i> | <i>C_{0r}</i> | <i>C_a</i> | | <i>C_{0a}</i> | <i>C_r</i> | <i>C_{0r}</i> | | | | <i>C_a</i> | <i>C_{0a}</i> |
| 114.3 | 152.4 | 19.05 | 2 | KFC045 | 29.4 | 30.8 | KFA045 | 31.7 | 36.4 | 41.7 | 110 | KFX045 | 25.6 | 26.3 | 42.6 | 115 | 0.953 | 0.971 | 0.953 |
| | 165.1 | 25.4 | 2 | KGC045 | 43.6 | 42.7 | KGA045 | 47.1 | 50.1 | 62.0 | 152 | KGX045 | 38.1 | 36.4 | 63.6 | 152 | 1.81 | 1.79 | 1.81 |
| 120.65 | 133.35 | 6.35 | 0.6 | KAC047 | 6.10 | 9.20 | KAA047 | 6.40 | 10.6 | 8.40 | 32.1 | KAX047 | 5.30 | 7.95 | 8.55 | 39.0 | 0.104 | 0.100 | 0.104 |
| | 136.525 | 7.938 | 1 | KBC047 | 8.55 | 12.1 | KBA047 | 9.10 | 14.2 | 12.0 | 42.9 | KBX047 | 7.45 | 10.4 | 12.1 | 50.4 | 0.154 | 0.159 | 0.154 |
| | 139.7 | 9.525 | 1 | KCC047 | 10.9 | 14.4 | KCA047 | 12.0 | 17.5 | 15.7 | 53.0 | KCX047 | 9.50 | 12.4 | 15.5 | 59.1 | 0.227 | 0.231 | 0.227 |
| | 146.05 | 12.7 | 1.5 | KDC047 | 16.5 | 19.6 | KDA047 | 17.5 | 22.8 | 23.0 | 69.1 | KDX047 | 14.3 | 16.8 | 23.6 | 78.2 | 0.426 | 0.422 | 0.426 |
| | 158.75 | 19.05 | 2 | KFC047 | 29.9 | 32.1 | KFA047 | 32.0 | 37.5 | 42.2 | 114 | KFX047 | 26.1 | 27.5 | 43.3 | 121 | 0.998 | 1.03 | 0.998 |
| | 171.45 | 25.4 | 2 | KGC047 | 44.9 | 45.2 | KGA047 | 48.0 | 52.1 | 63.1 | 158 | KGX047 | 39.2 | 38.6 | 65.4 | 162 | 1.86 | 1.89 | 1.86 |
| 127 | 139.7 | 6.35 | 0.6 | KAC050 | 6.20 | 9.65 | KAA050 | 6.50 | 11.1 | 8.55 | 33.6 | KAX050 | 5.35 | 8.35 | 8.65 | 41.1 | 0.109 | 0.104 | 0.109 |
| | 142.875 | 7.938 | 1 | KBC050 | 8.80 | 12.8 | KBA050 | 9.25 | 14.8 | 12.2 | 44.7 | KBX050 | 7.60 | 11.0 | 12.4 | 53.6 | 0.172 | 0.168 | 0.172 |
| | 146.05 | 9.525 | 1 | KCC050 | 11.1 | 15.0 | KCA050 | 12.2 | 18.4 | 16.0 | 55.7 | KCX050 | 9.65 | 12.9 | 15.8 | 62.1 | 0.263 | 0.245 | 0.263 |
| | 152.4 | 12.7 | 1.5 | KDC050 | 16.9 | 20.8 | KDA050 | 17.8 | 23.8 | 23.4 | 72.2 | KDX050 | 14.7 | 17.9 | 24.2 | 83.5 | 0.454 | 0.445 | 0.454 |
| | 165.1 | 19.05 | 2 | KFC050 | 30.5 | 33.4 | KFA050 | 32.4 | 38.6 | 42.6 | 117 | KFX050 | 26.5 | 28.7 | 44.0 | 127 | 1.04 | 1.08 | 1.04 |
| | 177.8 | 25.4 | 2 | KGC050 | 46.2 | 47.6 | KGA050 | 48.8 | 54.2 | 64.3 | 164 | KGX050 | 40.3 | 40.7 | 67.1 | 173 | 1.95 | 2.00 | 1.95 |
| 139.7 | 152.4 | 6.35 | 0.6 | KAC055 | 6.40 | 10.5 | KAA055 | 6.75 | 12.1 | 8.85 | 36.8 | KAX055 | 5.55 | 9.10 | 8.90 | 45.1 | 0.113 | 0.113 | 0.113 |
| | 155.575 | 7.938 | 1 | KBC055 | 9.10 | 13.9 | KBA055 | 9.60 | 16.2 | 12.6 | 49.0 | KBX055 | 7.85 | 12.0 | 12.7 | 58.8 | 0.186 | 0.181 | 0.186 |
| | 158.75 | 9.525 | 1 | KCC055 | 11.5 | 16.4 | KCA055 | 12.5 | 19.8 | 16.5 | 60.0 | KCX055 | 10.0 | 14.1 | 16.2 | 68.2 | 0.268 | 0.263 | 0.268 |
| | 165.1 | 12.7 | 1.5 | KDC055 | 17.5 | 22.6 | KDA055 | 18.4 | 25.9 | 24.2 | 78.5 | KDX055 | 15.2 | 19.4 | 24.9 | 91.6 | 0.481 | 0.481 | 0.481 |
| | 177.8 | 19.05 | 2 | KFC055 | 31.5 | 36.1 | KFA055 | 33.6 | 42.1 | 44.3 | 128 | KFX055 | 27.4 | 31.0 | 45.3 | 140 | 1.13 | 1.17 | 1.13 |
| | 190.5 | 25.4 | 2 | KGC055 | 47.0 | 49.8 | KGA055 | 50.5 | 58.3 | 66.4 | 177 | KGX055 | 41.0 | 42.6 | 68.0 | 184 | 2.13 | 2.15 | 2.13 |
| 152.4 | 165.1 | 6.35 | 0.6 | KAC060 | 6.60 | 11.4 | KAA060 | 6.95 | 13.2 | 9.15 | 39.9 | KAX060 | 5.75 | 9.85 | 9.15 | 49.1 | 0.127 | 0.127 | 0.127 |
| | 168.275 | 7.938 | 1 | KBC060 | 9.35 | 15.1 | KBA060 | 9.90 | 17.6 | 13.0 | 53.3 | KBX060 | 8.10 | 13.0 | 13.1 | 64.1 | 0.200 | 0.200 | 0.200 |
| | 171.45 | 9.525 | 1 | KCC060 | 11.9 | 17.7 | KCA060 | 12.9 | 21.5 | 17.0 | 65.3 | KCX060 | 10.3 | 15.3 | 16.7 | 74.2 | 0.286 | 0.290 | 0.286 |
| | 177.8 | 12.7 | 1.5 | KDC060 | 18.0 | 24.4 | KDA060 | 19.0 | 27.9 | 24.9 | 84.7 | KDX060 | 15.7 | 21.0 | 25.5 | 99.7 | 0.526 | 0.522 | 0.526 |
| | 190.5 | 19.05 | 2 | KFC060 | 32.5 | 38.8 | KFA060 | 34.8 | 45.6 | 45.8 | 138 | KFX060 | 28.2 | 33.3 | 46.5 | 152 | 1.22 | 1.23 | 1.22 |
| | 203.2 | 25.4 | 2 | KGC060 | 49.3 | 54.7 | KGA060 | 52.0 | 62.4 | 68.4 | 189 | KGX060 | 42.9 | 46.8 | 71.1 | 205 | 2.31 | 2.30 | 2.31 |
| 165.1 | 177.8 | 6.35 | 0.6 | KAC065 | 6.80 | 12.3 | KAA065 | 7.15 | 14.2 | 9.40 | 43.0 | KAX065 | 5.90 | 10.6 | 9.40 | 53.2 | 0.136 | 0.136 | 0.136 |
| | 180.975 | 7.938 | 1 | KBC065 | 9.65 | 16.3 | KBA065 | 10.1 | 18.8 | 13.3 | 56.9 | KBX065 | 8.35 | 14.0 | 13.4 | 69.3 | 0.213 | 0.213 | 0.213 |

K-series super thin section ball bearings
open type


d (165.1) ~ 228.6 mm

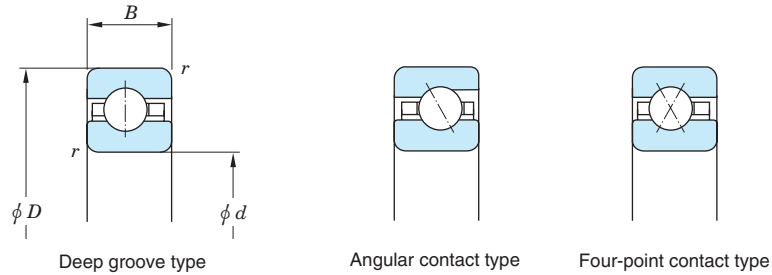

| Boundary dimensions (mm) | | | | Deep groove type | | Angular contact type | | | | Four-point contact type | | | | (Refer.) Mass (kg) | | |
|--------------------------|---------|-------|----------|------------------|---|----------------------|--|--|---------------|-------------------------|--|-------|-------|--------------------|----------------------|-------------------------|
| d | D | B | r min. | Bearing No. | Basic load ratings (kN) C_r C_{0r} | Bearing No. | Basic load ratings (kN) C_r C_{0r} C_a C_{0a} | | | Bearing No. | Basic load ratings (kN) C_r C_{0r} C_a C_{0a} | | | Deep groove type | Angular contact type | Four-point contact type |
| 165.1 | 184.15 | 9.525 | 1 | KCC065 | 12.2 19.0 | KCA065 | 13.4 23.3 17.6 70.6 | | KCX065 | 10.6 16.4 17.1 80.3 | 0.308 | 0.308 | 0.308 | | | |
| | 190.5 | 12.7 | 1.5 | KDC065 | 18.6 26.1 | KDA065 | 19.5 30.0 25.6 90.9 | | KDX065 | 16.1 22.5 26.2 108 | 0.553 | 0.562 | 0.553 | | | |
| | 203.2 | 19.05 | 2 | KFC065 | 33.4 41.5 | KFA065 | 36.0 49.1 47.3 149 | | KFX065 | 29.0 35.6 47.7 164 | 1.32 | 1.33 | 1.32 | | | |
| | 215.9 | 25.4 | 2 | KGC065 | 50.0 57.0 | KGA065 | 53.5 66.5 70.3 202 | | KGX065 | 43.5 48.8 71.8 216 | 2.45 | 2.45 | 2.45 | | | |
| 177.8 | 190.5 | 6.35 | 0.6 | KAC070 | 7.00 13.2 | KAA070 | 7.35 15.2 9.65 46.1 | | KAX070 | 6.05 11.4 9.60 57.2 | 0.141 | 0.145 | 0.141 | | | |
| | 193.675 | 7.938 | 1 | KBC070 | 9.90 17.4 | KBA070 | 10.4 20.2 13.7 61.2 | | KBX070 | 8.55 15.0 13.7 74.6 | 0.227 | 0.227 | 0.227 | | | |
| | 196.85 | 9.525 | 1 | KCC070 | 12.5 20.4 | KCA070 | 13.6 24.7 17.9 74.9 | | KCX070 | 10.9 17.6 17.5 86.3 | 0.331 | 0.336 | 0.331 | | | |
| | 203.2 | 12.7 | 1.5 | KDC070 | 19.0 27.9 | KDA070 | 20.0 32.1 26.3 97.2 | | KDX070 | 16.5 24.0 26.7 116 | 0.594 | 0.603 | 0.594 | | | |
| | 215.9 | 19.05 | 2 | KFC070 | 34.3 44.1 | KFA070 | 37.0 52.6 48.7 159 | | KFX070 | 29.8 37.9 48.7 176 | 1.45 | 1.43 | 1.45 | | | |
| | 228.6 | 25.4 | 2 | KGC070 | 52.1 61.8 | KGA070 | 54.8 70.7 72.2 214 | | KGX070 | 45.3 53.0 74.5 237 | 2.63 | 2.66 | 2.63 | | | |
| 190.5 | 203.2 | 6.35 | 0.6 | KAC075 | 7.15 14.1 | KAA075 | 7.50 16.2 9.90 49.2 | | KAX075 | 6.20 12.2 9.80 61.3 | 0.154 | 0.154 | 0.154 | | | |
| | 206.375 | 7.938 | 1 | KBC075 | 10.1 18.6 | KBA075 | 10.7 21.6 14.1 65.4 | | KBX075 | 8.80 16.0 14.0 79.8 | 0.240 | 0.245 | 0.240 | | | |
| | 209.55 | 9.525 | 1 | KCC075 | 12.8 21.7 | KCA075 | 14.0 26.5 18.4 80.2 | | KCX075 | 11.1 18.7 17.8 92.4 | 0.354 | 0.354 | 0.354 | | | |
| | 215.9 | 12.7 | 1.5 | KDC075 | 19.5 29.7 | KDA075 | 20.5 34.1 27.0 103 | | KDX075 | 16.9 25.6 27.3 124 | 0.640 | 0.644 | 0.640 | | | |
| | 228.6 | 19.05 | 2 | KFC075 | 35.1 46.8 | KFA075 | 37.5 54.8 49.3 166 | | KFX075 | 30.5 40.2 49.8 188 | 1.54 | 1.54 | 1.54 | | | |
| | 241.3 | 25.4 | 2 | KGC075 | 52.6 64.1 | KGA075 | 56.2 74.8 73.9 227 | | KGX075 | 45.8 55.0 75.2 249 | 2.77 | 2.81 | 2.77 | | | |
| 203.2 | 215.9 | 6.35 | 0.6 | KAC080 | 7.35 15.0 | KAA080 | 7.70 17.3 10.1 52.3 | | KAX080 | 6.35 13.0 10.0 65.3 | 0.172 | 0.163 | 0.172 | | | |
| | 219.075 | 7.938 | 1 | KBC080 | 10.4 19.7 | KBA080 | 11.0 23.0 14.4 69.7 | | KBX080 | 9.00 17.0 14.3 85.1 | 0.259 | 0.259 | 0.259 | | | |
| | 222.25 | 9.525 | 1 | KCC080 | 13.1 23.1 | KCA080 | 14.4 28.2 18.9 85.5 | | KCX080 | 11.4 19.9 18.2 98.5 | 0.381 | 0.381 | 0.381 | | | |
| | 228.6 | 12.7 | 1.5 | KDC080 | 20.0 31.5 | KDA080 | 21.0 36.2 27.6 110 | | KDX080 | 17.3 27.1 27.9 132 | 0.694 | 0.689 | 0.694 | | | |
| | 241.3 | 19.05 | 2 | KFC080 | 35.9 49.5 | KFA080 | 38.5 58.3 50.6 177 | | KFX080 | 31.2 42.5 50.7 200 | 1.59 | 1.64 | 1.59 | | | |
| | 254 | 25.4 | 2 | KGC080 | 54.5 69.0 | KGA080 | 57.4 78.9 75.5 239 | | KGX080 | 47.4 59.2 77.6 270 | 2.95 | 2.97 | 2.95 | | | |
| 228.6 | 241.3 | 6.35 | 0.6 | KAC090 | 7.65 16.8 | KAA090 | 8.00 19.3 10.5 58.6 | | KAX090 | 6.60 14.5 10.4 73.4 | 0.200 | 0.186 | 0.200 | | | |
| | 244.475 | 7.938 | 1 | KBC090 | 10.8 22.1 | KBA090 | 11.4 25.6 15.0 77.6 | | KBX090 | 9.35 19.1 14.8 95.6 | 0.299 | 0.290 | 0.299 | | | |
| | 247.65 | 9.525 | 1 | KCC090 | 13.7 25.7 | KCA090 | 14.9 31.4 19.6 95.1 | | KCX090 | 11.9 22.2 18.9 111 | 0.426 | 0.445 | 0.426 | | | |
| | 254 | 12.7 | 1.5 | KDC090 | 20.8 35.0 | KDA090 | 21.8 40.3 28.7 122 | | KDX090 | 18.0 30.2 28.9 148 | 0.780 | 0.767 | 0.780 | | | |
| | 266.7 | 19.05 | 2 | KFC090 | 37.4 54.8 | KFA090 | 40.3 65.3 53.1 198 | | KFX090 | 32.5 47.2 52.6 224 | 1.77 | 1.79 | 1.77 | | | |
| | 279.4 | 25.4 | 2 | KGC090 | 56.8 76.1 | KGA090 | 59.8 87.1 78.7 264 | | KGX090 | 49.4 65.3 80.5 302 | 3.27 | 3.27 | 3.27 | | | |

K-series super thin section ball bearings
open type


d 254 ~ 406.4 mm

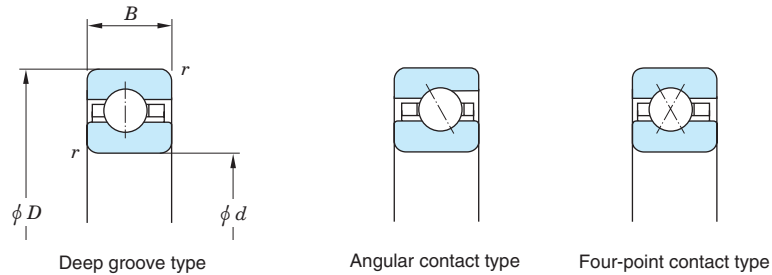

| Boundary dimensions (mm) | | | | Deep groove type | | | Angular contact type | | | | Four-point contact type | | | | (Refer.) Mass (kg) | | | | |
|--------------------------|--------------|----------|------------------|------------------|-------------------------|-----------------------|----------------------|-------------------------|-----------------------|----------------------|-------------------------|-------------------------|----------------------|-----------------------|--------------------|----------------------|-------------------------|----------------------|-----------------------|
| <i>d</i> | <i>D</i> | <i>B</i> | <i>r</i> min. | Bearing No. | Basic load ratings (kN) | | Bearing No. | Basic load ratings (kN) | | | Bearing No. | Basic load ratings (kN) | | | Deep groove type | Angular contact type | Four-point contact type | | |
| | | | | | <i>C_r</i> | <i>C_{0r}</i> | | <i>C_r</i> | <i>C_{0r}</i> | <i>C_a</i> | | <i>C_{0a}</i> | <i>C_r</i> | <i>C_{0r}</i> | | | | <i>C_a</i> | <i>C_{0a}</i> |
| 254 | 266.7 | 6.35 | 0.6 | KAC100 | 7.95 | 18.6 | KAA100 | 8.30 | 21.4 | 11.0 | 64.8 | KAX100 | 6.85 | 16.0 | 10.7 | 81.4 | 0.227 | 0.204 | 0.227 |
| | 269.875 | 7.938 | 1 | KBC100 | 11.2 | 24.4 | KBA100 | 11.9 | 28.4 | 15.6 | 86.1 | KBX100 | 9.75 | 21.1 | 15.3 | 106 | 0.331 | 0.322 | 0.331 |
| | 273.05 | 9.525 | 1 | KCC100 | 14.2 | 28.4 | KCA100 | 15.6 | 34.9 | 20.5 | 106 | KCX100 | 12.3 | 24.5 | 19.5 | 123 | 0.481 | 0.472 | 0.481 |
| | 279.4 | 12.7 | 1.5 | KDC100 | 21.6 | 38.6 | KDA100 | 22.7 | 44.4 | 29.8 | 135 | KDX100 | 18.7 | 33.3 | 29.8 | 164 | 0.853 | 0.848 | 0.853 |
| | 292.1 | 19.05 | 2 | KFC100 | 38.8 | 60.2 | KFA100 | 41.6 | 71.1 | 54.7 | 215 | KFX100 | 33.7 | 51.8 | 54.3 | 249 | 1.95 | 2.00 | 1.95 |
| | 304.8 | 25.4 | 2 | KGC100 | 59.0 | 83.2 | KGA100 | 62.0 | 95.3 | 81.6 | 289 | KGX100 | 51.2 | 71.5 | 83.1 | 334 | 3.58 | 3.63 | 3.58 |
| | 279.4 | 292.1 | 6.35 | 0.6 | KAC110 | 8.20 | 20.3 | KAA110 | 8.60 | 23.4 | 11.3 | 71.0 | KAX110 | 7.10 | 17.6 | 11.1 | 89.5 | 0.236 | 0.227 |
| | 295.275 | 7.938 | 1 | KBC110 | 11.6 | 26.7 | KBA110 | 12.3 | 31.0 | 16.1 | 94.0 | KBX110 | 10.1 | 23.1 | 15.7 | 117 | 0.340 | 0.354 | 0.340 |
| | 298.45 | 9.525 | 1 | KCC110 | 14.7 | 31.1 | KCA110 | 16.1 | 38.0 | 21.1 | 115 | KCX110 | 12.7 | 26.8 | 20.1 | 135 | 0.526 | 0.517 | 0.526 |
| | 304.8 | 12.7 | 1.5 | KDC110 | 22.3 | 42.2 | KDA110 | 23.4 | 48.5 | 30.8 | 147 | KDX110 | 19.3 | 36.4 | 30.7 | 180 | 0.934 | 0.930 | 0.934 |
| | 317.5 | 19.05 | 2 | KFC110 | 40.2 | 65.5 | KFA110 | 43.2 | 78.0 | 56.9 | 236 | KFX110 | 34.8 | 56.4 | 55.9 | 273 | 2.18 | 2.15 | 2.18 |
| | 330.2 | 25.4 | 2 | KGC110 | 61.0 | 90.3 | KGA110 | 64.1 | 104 | 84.3 | 314 | KGX110 | 52.9 | 77.7 | 85.5 | 366 | 3.90 | 3.94 | 3.90 |
| 304.8 | 317.5 | 6.35 | 0.6 | KAC120 | 8.45 | 22.1 | KAA120 | 8.90 | 25.5 | 11.7 | 77.3 | KAX120 | 7.35 | 19.1 | 11.4 | 97.6 | 0.254 | 0.245 | 0.254 |
| | 320.675 | 7.938 | 1 | KBC120 | 12.0 | 29.0 | KBA120 | 12.7 | 33.8 | 16.7 | 103 | KBX120 | 10.4 | 25.1 | 16.2 | 127 | 0.376 | 0.386 | 0.376 |
| | 323.85 | 9.525 | 1 | KCC120 | 15.2 | 33.8 | KCA120 | 16.5 | 41.2 | 21.8 | 125 | KCX120 | 13.1 | 29.2 | 20.6 | 147 | 0.567 | 0.558 | 0.567 |
| | 330.2 | 12.7 | 1.5 | KDC120 | 23.0 | 45.7 | KDA120 | 24.2 | 52.6 | 31.8 | 160 | KDX120 | 20.0 | 39.5 | 31.5 | 197 | 1.02 | 1.01 | 1.02 |
| | 342.9 | 19.05 | 2 | KFC120 | 41.4 | 70.9 | KFA120 | 44.3 | 83.8 | 58.3 | 254 | KFX120 | 35.9 | 61.1 | 57.4 | 297 | 2.36 | 2.36 | 2.36 |
| | 355.6 | 25.4 | 2 | KGC120 | 62.9 | 97.5 | KGA120 | 66.0 | 112 | 86.9 | 339 | KGX120 | 54.5 | 83.9 | 87.8 | 399 | 4.22 | 4.30 | 4.22 |
| | 355.6 | 371.475 | 7.938 | 1 | KBC140 | 12.7 | 33.7 | KBA140 | 13.4 | 39.1 | 17.6 | 118 | KBX140 | 11.0 | 29.1 | 17.0 | 148 | 0.476 | 0.445 |
| | 374.65 | 9.525 | 1 | KCC140 | 16.0 | 39.1 | KCA140 | 17.5 | 47.9 | 23.0 | 145 | KCX140 | 13.9 | 33.8 | 21.6 | 171 | 0.689 | 0.649 | 0.689 |
| | 381 | 12.7 | 1.5 | KDC140 | 24.3 | 52.9 | KDA140 | 25.5 | 60.9 | 33.6 | 184 | KDX140 | 21.1 | 45.7 | 33.1 | 229 | 1.24 | 1.17 | 1.24 |
| | 393.7 | 19.05 | 2 | KFC140 | 43.7 | 81.5 | KFA140 | 46.8 | 96.5 | 61.6 | 293 | KFX140 | 37.9 | 70.3 | 60.2 | 345 | 2.72 | 2.61 | 2.72 |
| | 406.4 | 25.4 | 2 | KGC140 | 66.3 | 112 | KGA140 | 69.7 | 128 | 91.7 | 389 | KGX140 | 57.5 | 96.2 | 92.0 | 463 | 4.90 | 4.94 | 4.90 |
| 406.4 | 422.275 | 7.938 | 1 | KBC160 | 13.3 | 38.3 | KBA160 | 14.0 | 44.5 | 18.4 | 135 | KBX160 | 11.5 | 33.1 | 17.7 | 169 | 0.544 | 0.508 | 0.544 |
| | 425.45 | 9.525 | 1 | KCC160 | 16.8 | 44.4 | KCA160 | 18.4 | 54.5 | 24.2 | 165 | KCX160 | 14.6 | 38.4 | 22.6 | 195 | 0.785 | 0.739 | 0.785 |
| | 431.8 | 12.7 | 1.5 | KDC160 | 25.5 | 60.0 | KDA160 | 26.8 | 69.1 | 35.2 | 209 | KDX160 | 22.1 | 51.8 | 34.5 | 261 | 1.41 | 1.33 | 1.41 |
| | 444.5 | 19.05 | 2 | KFC160 | 45.8 | 92.2 | KFA160 | 49.0 | 109 | 64.5 | 331 | KFX160 | 39.7 | 79.6 | 62.7 | 394 | 3.22 | 3.08 | 3.22 |
| | 457.2 | 25.4 | 2 | KGC160 | 69.5 | 126 | KGA160 | 73.0 | 145 | 96.0 | 439 | KGX160 | 60.3 | 109 | 95.9 | 528 | 5.58 | 5.62 | 5.58 |

K-series super thin section ball bearings open type


d 457.2 ~ 1 016 mm

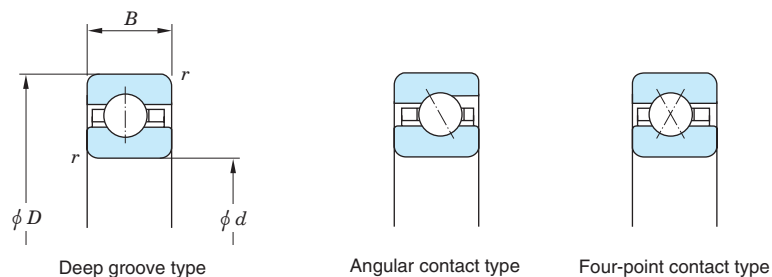

| Boundary dimensions (mm) | | | | Deep groove type Basic load ratings | | | Angular contact type Basic load ratings | | | | Four-point contact type Basic load ratings | | | | (Refer.) Mass (kg) | | | | |
|-----------------------------|---------|-------|-----------|--|----------------|-----------------|--|----------------|-----------------|----------------|---|---------------|----------------|-----------------|-----------------------|-----------------|------------------|----------------------|-------------------------|
| d | D | B | r min. | Bearing No. | C _r | C _{0r} | Bearing No. | C _r | C _{0r} | C _a | C _{0a} | Bearing No. | C _r | C _{0r} | C _a | C _{0a} | Deep groove type | Angular contact type | Four-point contact type |
| 457.2 | 473.075 | 7.938 | 1 | KBC180 | 13.9 | 42.9 | KBA180 | 14.6 | 49.9 | 19.2 | 151 | KBX180 | 12.0 | 37.1 | 18.4 | 190 | 0.612 | 0.572 | 0.612 |
| | 476.25 | 9.525 | 1 | KCC180 | 17.5 | 49.8 | KCA180 | 19.2 | 61.2 | 25.3 | 185 | KCX180 | 15.2 | 43.0 | 23.4 | 220 | 0.880 | 0.830 | 0.880 |
| | 482.6 | 12.7 | 1.5 | KDC180 | 26.6 | 67.1 | KDA180 | 27.6 | 77.3 | 36.3 | 234 | KDX180 | 23.0 | 58.0 | 35.8 | 293 | 1.58 | 1.49 | 1.58 |
| | 495.3 | 19.05 | 2 | KFC180 | 47.8 | 103 | KFA180 | 51.5 | 123 | 67.7 | 373 | KFX180 | 41.4 | 88.8 | 65.0 | 442 | 3.58 | 3.48 | 3.58 |
| | 508 | 25.4 | 2 | KGC180 | 72.5 | 140 | KGA180 | 76.0 | 161 | 100 | 488 | KGX180 | 62.8 | 121 | 99.4 | 592 | 6.21 | 6.26 | 6.21 |
| 508 | 523.875 | 7.938 | 1 | KBC200 | 14.4 | 47.6 | KBA200 | 15.2 | 55.3 | 20.0 | 168 | KBX200 | 12.5 | 41.2 | 19.0 | 211 | 0.680 | 0.635 | 0.680 |
| | 527.05 | 9.525 | 1 | KCC200 | 18.2 | 55.1 | KCA200 | 19.9 | 67.5 | 26.2 | 205 | KCX200 | 15.8 | 47.7 | 24.2 | 244 | 0.980 | 0.921 | 0.980 |
| | 533.4 | 12.7 | 1.5 | KDC200 | 27.6 | 74.3 | KDA200 | 29.0 | 85.6 | 38.1 | 259 | KDX200 | 23.9 | 64.2 | 37.0 | 326 | 1.75 | 1.66 | 1.75 |
| | 546.1 | 19.05 | 2 | KFC200 | 49.6 | 114 | KFA200 | 53.4 | 136 | 70.3 | 412 | KFX200 | 43.0 | 98.1 | 67.2 | 491 | 4.04 | 3.84 | 4.04 |
| | 558.8 | 25.4 | 2 | KGC200 | 75.2 | 154 | KGA200 | 78.9 | 178 | 104 | 538 | KGX200 | 65.2 | 133 | 103 | 657 | 8.53 | 6.89 | 8.53 |
| 635 | 654.05 | 9.525 | 1 | KCC250 | 19.7 | 68.5 | KCA250 | 21.6 | 84.0 | 28.4 | 255 | KCX250 | 17.1 | 59.2 | 26.0 | 304 | 1.22 | 1.14 | 1.22 |
| | 660.4 | 12.7 | 1.5 | KDC250 | 29.9 | 92.1 | KDA250 | 31.4 | 106 | 41.3 | 322 | KDX250 | 25.9 | 79.6 | 39.7 | 407 | 2.17 | 2.06 | 2.17 |
| | 673.1 | 19.05 | 2 | KFC250 | 53.7 | 140 | KFA250 | 57.6 | 167 | 75.8 | 506 | KFX250 | 46.5 | 121 | 72.0 | 612 | 4.94 | 4.76 | 4.94 |
| | 685.8 | 25.4 | 2 | KGC250 | 81.4 | 190 | KGA250 | 85.4 | 219 | 112 | 663 | KGX250 | 70.5 | 164 | 110 | 819 | 8.85 | 8.53 | 8.85 |
| 762 | 781.05 | 9.525 | 1 | KCC300 | 21.1 | 81.9 | KCA300 | 23.1 | 101 | 30.3 | 305 | KCX300 | 18.3 | 70.8 | 27.6 | 365 | 1.46 | 1.37 | 1.46 |
| | 787.4 | 12.7 | 1.5 | KDC300 | 32.0 | 110 | KDA300 | 33.5 | 127 | 44.1 | 384 | KDX300 | 27.7 | 95.0 | 42.1 | 487 | 2.60 | 2.47 | 2.60 |
| | 800.1 | 19.05 | 2 | KFC300 | 57.3 | 167 | KFA300 | 61.6 | 200 | 81.0 | 605 | KFX300 | 49.6 | 144 | 76.3 | 733 | 5.90 | 5.67 | 5.90 |
| | 812.8 | 25.4 | 2 | KGC300 | 86.8 | 226 | KGA300 | 91.1 | 260 | 120 | 788 | KGX300 | 75.2 | 195 | 116 | 980 | 10.6 | 10.2 | 10.6 |
| 889 | 927.1 | 19.05 | 2 | KFC350 | 60.6 | 194 | KFA350 | 65.2 | 232 | 85.8 | 703 | KFX350 | 52.5 | 168 | 80.1 | 854 | 6.85 | 6.62 | 6.85 |
| | 939.8 | 25.4 | 2 | KGC350 | 91.7 | 261 | KGA350 | 96.2 | 301 | 127 | 912 | KGX350 | 79.4 | 226 | 122 | 1 140 | 12.3 | 11.9 | 12.3 |
| 1 016 | 1 054.1 | 19.05 | 2 | KFC400 | 63.5 | 221 | KFA400 | 68.4 | 264 | 90.0 | 801 | KFX400 | 55.0 | 191 | 83.6 | 975 | 7.80 | 7.53 | 7.80 |
| | 1 066.8 | 25.4 | 2 | KGC400 | 96.2 | 297 | KGA400 | 101 | 342 | 133 | 1 040 | KGX400 | 83.3 | 257 | 128 | 1 300 | 14.0 | 13.5 | 14.0 |

K-series super thin section ball bearings
sealed type

d 101.6 ~ 304.8 mm

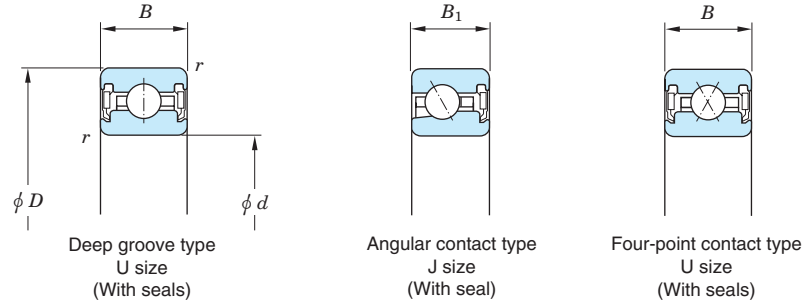

| Boundary dimensions (mm) | | | | | Deep groove type Basic load ratings | | | Angular contact type Basic load ratings | | | | Four-point contact type Basic load ratings | | | | (Refer.) Mass (kg) | | | | |
|-----------------------------|----------|----------|-----------------------|------------------|--|-----------------------|------------------------|--|-----------------------|------------------------|-----------------------|---|-------------|-----------------------|------------------------|-----------------------|------------------------|------------------|----------------------|-------------------------|
| <i>d</i> | <i>D</i> | <i>B</i> | <i>B</i> ₁ | <i>r</i> min. | Bearing No. | <i>C</i> _r | <i>C</i> _{0r} | Bearing No. | <i>C</i> _r | <i>C</i> _{0r} | <i>C</i> _a | <i>C</i> _{0a} | Bearing No. | <i>C</i> _r | <i>C</i> _{0r} | <i>C</i> _a | <i>C</i> _{0a} | Deep groove type | Angular contact type | Four-point contact type |
| 101.6 | 120.65 | 12.7 | 11.1 | 0.4 | KUC040 2RD | 10.3 | 12.4 | KJA040 RD | 11.2 | 14.9 | 14.7 | 45.1 | KUX040 2RD | 8.95 | 10.6 | 14.8 | 50.0 | 0.249 | 0.222 | 0.249 |
| 107.95 | 127 | 12.7 | 11.1 | 0.4 | KUC042 2RD | 10.5 | 13.0 | KJA042 RD | 11.5 | 15.8 | 15.1 | 47.8 | KUX042 2RD | 9.15 | 11.2 | 15.0 | 53.0 | 0.263 | 0.236 | 0.263 |
| 114.3 | 133.35 | 12.7 | 11.1 | 0.4 | KUC045 2RD | 10.7 | 13.7 | KJA045 RD | 11.7 | 16.6 | 15.4 | 50.4 | KUX045 2RD | 9.30 | 11.8 | 15.3 | 56.1 | 0.277 | 0.254 | 0.277 |
| 120.65 | 139.7 | 12.7 | 11.1 | 0.4 | KUC047 2RD | 10.9 | 14.4 | KJA047 RD | 12.0 | 17.5 | 15.7 | 53.0 | KUX047 2RD | 9.50 | 12.4 | 15.5 | 59.1 | 0.295 | 0.268 | 0.295 |
| 127 | 146.05 | 12.7 | 11.1 | 0.4 | KUC050 2RD | 11.1 | 15.0 | KJA050 RD | 12.2 | 18.4 | 16.0 | 55.7 | KUX050 2RD | 9.65 | 12.9 | 15.8 | 62.1 | 0.308 | 0.281 | 0.308 |
| 139.7 | 158.75 | 12.7 | 11.1 | 0.4 | KUC055 2RD | 11.5 | 16.4 | KJA055 RD | 12.5 | 19.8 | 16.5 | 60.0 | KUX055 2RD | 10.0 | 14.1 | 16.2 | 68.2 | 0.336 | 0.304 | 0.336 |
| 152.4 | 171.45 | 12.7 | 11.1 | 0.4 | KUC060 2RD | 11.9 | 17.7 | KJA060 RD | 12.9 | 21.5 | 17.0 | 65.3 | KUX060 2RD | 10.3 | 15.3 | 16.7 | 74.2 | 0.367 | 0.331 | 0.367 |
| 165.1 | 184.15 | 12.7 | 11.1 | 0.4 | KUC065 2RD | 12.2 | 19.0 | KJA065 RD | 13.4 | 23.3 | 17.6 | 70.6 | KUX065 2RD | 10.6 | 16.4 | 17.1 | 80.3 | 0.395 | 0.354 | 0.395 |
| 177.8 | 196.85 | 12.7 | 11.1 | 0.4 | KUC070 2RD | 12.5 | 20.4 | KJA070 RD | 13.6 | 24.7 | 17.9 | 74.9 | KUX070 2RD | 10.9 | 17.6 | 17.5 | 86.3 | 0.422 | 0.381 | 0.422 |
| 190.5 | 209.55 | 12.7 | 11.1 | 0.4 | KUC075 2RD | 12.8 | 21.7 | KJA075 RD | 14.0 | 26.5 | 18.4 | 80.2 | KUX075 2RD | 11.1 | 18.7 | 17.8 | 92.4 | 0.449 | 0.404 | 0.449 |
| 203.2 | 222.25 | 12.7 | 11.1 | 0.4 | KUC080 2RD | 13.1 | 23.1 | KJA080 RD | 14.4 | 28.2 | 18.9 | 85.5 | KUX080 2RD | 11.4 | 19.9 | 18.2 | 98.5 | 0.481 | 0.431 | 0.481 |
| 228.6 | 247.65 | 12.7 | 11.1 | 0.4 | KUC090 2RD | 13.7 | 25.7 | KJA090 RD | 14.9 | 31.4 | 19.6 | 95.1 | KUX090 2RD | 11.9 | 22.2 | 18.9 | 111 | 0.535 | 0.499 | 0.535 |
| 254 | 273.05 | 12.7 | 11.1 | 0.4 | KUC100 2RD | 14.2 | 28.4 | KJA100 RD | 15.6 | 34.9 | 20.5 | 106 | KUX100 2RD | 12.3 | 24.5 | 19.5 | 123 | 0.594 | 0.531 | 0.594 |
| 279.4 | 298.45 | 12.7 | 11.1 | 0.4 | KUC110 2RD | 14.7 | 31.1 | KJA110 RD | 16.1 | 38.0 | 21.1 | 115 | KUX110 2RD | 12.7 | 26.8 | 20.1 | 135 | 0.649 | 0.581 | 0.649 |
| 304.8 | 323.85 | 12.7 | 11.1 | 0.4 | KUC120 2RD | 15.2 | 33.8 | KJA120 RD | 16.5 | 41.2 | 21.8 | 125 | KUX120 2RD | 13.1 | 29.2 | 20.6 | 147 | 0.708 | 0.630 | 0.708 |

Bearings for railway rolling stock axle journals

Bearings used to support rolling stock axle journals are required to be very strong and, at the same time, to be small because of limited space.

Double-row bearings that are larger in width than general bearings are popular in that they are compact and have high load ratings.

■ Cylindrical roller bearings


- Feature good high-speed performance, and can be maintained and inspected easily because of their separable structure.

Most commonly used bearing.


- Those with a rib next to the inner ring are able to support not only radial load but also a certain degree of axial load, so that a ball bearing is not required to accommodate the axial load.

■ Sealed type cylindrical roller bearing units and tapered roller bearing units

- Maintenance-free : pre-lubricated with grease and provided with oil seals.
- Can be used with a simplified axle box, or with an adapter instead.
- The inch series axle bearing units (ABU) are as specified in the "association of american rail-roads".

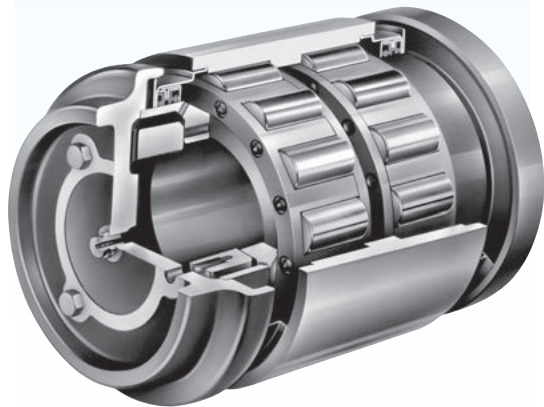


Cylindrical roller bearings




Bore diameter **85 – 133 mm**

Sealed type cylindrical roller bearing units



Bore diameter **95 – 120 mm**

Sealed type tapered roller bearing units(ABU)



Bore diameter **101.600 – 177.787 mm**

| | |
|---------------------------|---|
| Tolerances | <ul style="list-style-type: none"> Cylindrical roller and axial load support ball bearings : as specified in JIS B 1514-1, class 0 (Table 7-3 on pp. A 60–A 63). (The tolerances for cylindrical roller bearing width and overall width are as shown in Table 1.) Metric series ABU bearings: refer to Table 2. Inch series ABU bearings : refer to Table 3. |
| Recommended fits | Refer to Table 4. |
| Radial internal clearance | <ul style="list-style-type: none"> Cylindrical roller bearings : class C 3 UIC* standard cylindrical roller bearings : class C 4 (refer to Table 10-8 on p. A 106.) Axial load support ball bearings : class C 5 However, the clearance class should be adjusted according to the axle box structure. Consult with JTEKT for further information. ABU bearings : class C 3 (refer to Table 10-10 on p. A 110) *Denotes that the bearings are compatible with axle journals and axle boxes standardized by the UIC. |

Table 1 Cylindrical roller bearings for axle journals : tolerances for inner ring width, outer ring width and overall width

(1) Tolerances for inner ring width and inner ring overall width Unit : μm

| Bearing type | Design | Nominal bore diameter d (mm) | | Δ_{B_s} or $\Delta_{B_{1s}}$ | |
|--|----------------------|--------------------------------|-------|-------------------------------------|-------|
| | | over | up to | upper | lower |
| Inner ring one-piece type, Inner ring with a rib and loose rib | 1-1, 1-2 2-1, 2-3 | 80 | 120 | 0 | -400 |
| | | 120 | 180 | 0 | -500 |
| Two inner rings and spacer | 2-2 | 80 | 120 | 0 | -600 |
| | | 120 | 180 | 0 | -700 |

(2) Tolerances for outer ring width and outer ring overall width Unit : μm

| Bearing type | Design | Nominal bore diameter d (mm) | | Δ_{C_s} or $\Delta_{C_{1s}}$ | |
|-------------------------------|-------------------|--------------------------------|-------|-------------------------------------|-------|
| | | over | up to | upper | lower |
| Outer ring one-piece type | 2-3 | 80 | 120 | 0 | -300 |
| | | 120 | 180 | 0 | -350 |
| Outer ring and two loose ribs | 1-1 | 80 | 120 | +100 | -200 |
| | | 120 | 180 | +100 | -250 |
| Two outer rings | 2-1 ¹⁾ | 120 | 180 | 0 | -500 |
| Two outer rings and spacer | 1-2 2-1, 2-2 | 80 | 120 | 0 | -500 |
| | | 120 | 180 | 0 | -600 |

[Note] 1) (2-1) means that spacer shown in Design 2-1 is removed.

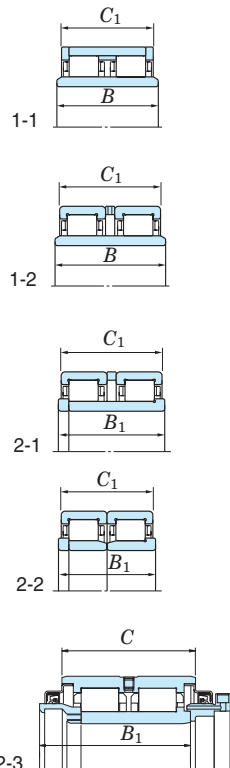


Table 2 Metric series ABU bearing tolerances Unit : μm

| Nominal bore diameter d (mm) | Single plane mean bore diameter deviation $\Delta_{d_{mp}}$ | | Single plane mean outside diameter deviation $\Delta_{D_{mp}}$ | | Single outer ring width deviation Δ_{C_s} | | Actual overall width of inner rings deviation $\Delta_{B_{1s}}$ | |
|--------------------------------|---|-------|--|-------|--|-------|---|-------|
| | upper | lower | upper | lower | upper | lower | upper | lower |
| 110 | 0 | -20 | | | +50 | -50 | | |
| 120 | 0 | -20 | 0 | -125 | +100 | -100 | +500 | -500 |
| 130 | 0 | -25 | | | +100 | -100 | | |




Table 3 Inch series ABU bearing tolerances Unit : μm


| Nominal bore diameter d (mm) | Single plane mean bore diameter deviation $\Delta_{d_{mp}}$ | | Single plane mean outside diameter deviation $\Delta_{D_{mp}}$ | | Single outer ring width deviation Δ_{C_s} | | Actual overall width of inner rings deviation $\Delta_{B_{1s}}$ | |
|--------------------------------|---|-------|--|-------|--|-------|---|-------|
| | upper | lower | upper | lower | upper | lower | upper | lower |
| 101.6 to 177.8 | +25 | 0 | +127 | 0 | +50 | -250 | +710 | -510 |

Table 4 Axle journal bearing recommended fits


| Bearing type | Axle journal diameter (mm) | | Axle journal tolerance class | Axle box bore tolerance class |
|--|----------------------------|-------|------------------------------|--|
| | over | up to | | |
| Cylindrical roller bearing Tapered roller bearing | 50 | 100 | (m 6), n 6 | H 7 |
| | 100 | 140 | n 6 | |
| | 140 | 240 | p 6 | |
| Axial load support deep groove ball bearing | All diameters | | k 5 | Clearance fit (clearance of approx. 0.2 to 0.6 mm) |

Cylindrical roller bearings
for railway rolling stock axle journals

d 85 ~ (120) mm




Design 1




Design 2


d (120) ~ 133 mm



Design 3



Design 4



Design 5


| <i>d</i> | Boundary dimensions (mm) | | | | | | Basic load ratings (kN) | | Bearing No. ²⁾ | Design ³⁾ | (Refer.) Mass (kg) |
|------------|-----------------------------|----------|----------|----------------------|--------------------------|---|----------------------------|------------------------|---------------------------|----------------------|--------------------------|
| | <i>D</i> | <i>B</i> | <i>C</i> | <i>F_w</i> | <i>r</i> _{min.} | <i>r</i> ₁ ¹⁾ _{min.} | <i>C_r</i> | <i>C</i> _{0r} | | | |
| 85 | 150 | 130 | 120 | 101.5 | 1.1 | (7) | 369 | 592 | 2U2217SC | 3 | 8.6 |
| 90 | 160 | 88 | 80 | 107 | 2 | 2 | 355 | 529 | 2CR90D | 1 | 7.2 |
| 95 | 170 | 120 | 105 | 114 | 1.1 | (10) | 497 | 804 | 2UJ95 | 4 | 10.9 |
| | 170 | 125 | 115 | 113.5 | 2.5 | (7) | 441 | 687 | 2CR95A | 1 | 11.5 |
| | 170 | 130 | 130 | 114 | 2 | 2 | 441 | 688 | 2UJ1917 | 3 | 11.4 |
| | 170 | 140 | 125 | 114 | 1.1 | (10) | 555 | 926 | 4UJ95 | 5 | 12.7 |
| 100 | 180 | 150 | 134 | 120 | 1.1 | (10) | 594 | 990 | 4UJ100 | 5 | 15.1 |
| | 190 | 140 | 130 | 122 | 2.5 | (7) | 697 | 1 120 | 2ODC19130/140 | 3 | 16.9 |
| | 200 | 170 | 170 | 125 | 2 | (7) | 755 | 1 160 | 2CR100 | 1 | 23.7 |
| | 200 | 170 | 170 | 125 | 2 | (10) | 755 | 1 160 | 2ODC20170 | 3 | 23.2 |
| 110 | 200 | 180 | 160 | 134 | 1.1 | (7) | 721 | 1 190 | JC3 | 5 | 22.6 |
| | 220 | 180 | 160 | 138 | 2.5 | (7) | 789 | 1 190 | JC6 | 1 | 30.0 |
| | 220 | 185 | 180 | 138 | 2 | (7) | 922 | 1 460 | 2CR110 | 1 | 31.3 |
| | 225 | 150 | 140 | 138 | 1.1 | (7) | 833 | 1 230 | JC1A | 4 | 27.7 |
| | 225 | 150 | 140 | 138 | 2.5 | (7) | 897 | 1 350 | 22DC23140/150 | 3 | 26.7 |
| | 235 | 180 | 160 | 141 | 2.5 | (7) | 934 | 1 430 | JC2A | 3 | 35.3 |
| 116 | 220 | 185 | 180 | 142 | 2 | (7) | 891 | 1 470 | 2CR116 | 1 | 30.5 |
| | 225 | 150 | 140 | 197.5 | 1.1 | (7) | 786 | 1 220 | 2UJ116 | 4 | 26.0 |
| 120 | 225 | 170 | 165 | 145 | 3 | (10) | 876 | 1 380 | JC35 | 1 | 29.4 |
| | 230 | 170 | 165 | 145 | 3 | (10) | 943 | 1 460 | JC34 | 1 | 30.8 |
| | 230 | 177 | 150 | 145 | 3 | (30) | 943 | 1 460 | JC27X | (1) | 29.7 |
| | 240 | 160 | 160 | 150 | 3 | 7.5 | 961 | 1 500 | (24NJ/NJP2480) | 2 | 33.9 |
| | 240 | 180 | 160 | 150 | 1.1 | (10) | 1 020 | 1 580 | JC11 | 4 | 35.5 |
| | 240 | 180 | 176 | 150 | 3 | (7) | 1 020 | 1 580 | JC12 | 1 | 37.7 |

| <i>d</i> | Boundary dimensions (mm) | | | | | | Basic load ratings (kN) | | Bearing No. ²⁾ | Design ³⁾ | (Refer.) Mass (kg) |
|------------|-----------------------------|----------|----------|----------------------|--------------------------|---|----------------------------|------------------------|---------------------------|----------------------|--------------------------|
| | <i>D</i> | <i>B</i> | <i>C</i> | <i>F_w</i> | <i>r</i> _{min.} | <i>r</i> ₁ ¹⁾ _{min.} | <i>C_r</i> | <i>C</i> _{0r} | | | |
| 120 | 240 | 185 | 180 | 150 | 2 | (7) | 983 | 1 600 | 2CR120A | 1 | 37.8 |
| 130 | 220 | 170 | 160 | 152 | 1.1 | 0.6 | 865 | 1 520 | 4UJ130B | 5 | 25.2 |
| | 240 | 160 | 160 | 157 | 3 | 5 | 867 | 1 390 | (2CR2624A) | 2 | 32.0 |
| | 240 | 180 | 160 | 158 | 1.1 | (10) | 970 | 1 610 | 4UJ130A | 5 | 35.8 |
| | 240 | 204 | 198 | 157 | 3 | 5 | 867 | 1 390 | (2CR2624) | 2 | 35.4 |
| | 250 | 160 | 160 | 158 | 3 | 7.5 | 1 090 | 1 720 | (26NJ/NJP2580) | 2 | 36.4 |
| | 260 | 180 | 160 | 163 | 1.1 | (10) | 1 080 | 1 710 | JC5 | 4 | 42.7 |
| | 260 | 185 | 180 | 163 | 3 | (7) | 1 030 | 1 610 | 2CR130A | 1 | 44.2 |
| | 260 | 186 | 172 | 164 | 3 | 7.5 | 1 220 | 1 930 | 26NJ/NUJ2686 | (2) | 44.6 |
| | 260 | 205.5 | 180 | 163 | 3 | (30) | 1 030 | 1 610 | JC21 | (1) | 45.1 |
| 270 | 215 | 210 | 164 | 4 | (15) | 1 280 | 2 000 | JC29 | 3 | 55.1 | |
| 280 | 215 | 210 | 167 | 4 | (15) | 1 440 | 2 250 | JC9-1 | 3 | 61.4 | |
| 133 | 280 | 215 | 210 | 167 | 4 | (15) | 1 440 | 2 250 | JC9-2 | 3 | 59.8 |


[Notes] 1) Values in () indicate axial chamfer dimension.
 2) Bearings indicated in () are in accordance with UIC standards.
 3) (1) means that the inner ring (rib side) shown in Design 1 has a special form.
 (2) means that loose rib shown in Design 2 is replaced with thrust collar.

Sealed type cylindrical roller bearings for railway rolling stock axle journals


d 95 ~ 120 mm




Design 1




Design 2




Design 3



Design 4




Design 5




Design 6

| Shaft dia. (mm) d | Unit No. | Design | Boundary dimensions (mm) | | | | | | | | | | | | | | Bearing No. | Basic load ratings (kN) | | (Refer.) Unit Mass (kg) | | |
|----------------------|----------|--------|--------------------------|-----|-----|----------------|----------------|----|-----|-----|----|----|----|--------|----|----|-------------|-------------------------|------------------------|-------------------------|----------------|-----------------|
| | | | d Brg. | D | C | B ₃ | d ₃ | E | F | G | H | K | L | M | P | Q | | R | S | | C _r | C _{0r} |
| 95 | JB1425 | 1 | 95 | 190 | 140 | 158 | 120 | 25 | 62 | 90 | 35 | 48 | — | M85×4 | — | 18 | 107 | 119 | 19RDC19140/158 | 610 | 910 | 24.5 |
| 100 | JB1199B | 2 | 100 | 195 | 150 | 175 | 130 | 30 | 120 | 105 | 42 | — | — | — | — | 24 | 123 | 130 | 20RDC20150/133B | 673 | 1040 | 27.5 |
| 110 | JB1462 | 3 | 110 | 220 | 145 | 171 | 155 | 39 | 70 | 110 | 50 | 42 | — | M100×2 | — | 33 | 127 | 134 | S-JC33 | 789 | 1190 | 35.9 |
| 120 | JB1356 | 4 | 120 | 220 | 150 | 170 | 158 | 46 | 70 | 116 | 36 | 51 | — | M115×4 | — | 19 | 133 | 131 | 24RDC22150/170 | 702 | 1110 | 34.9 |
| | JB1380D | 5 | 120 | 230 | 150 | 171 | 155 | 43 | 70 | 113 | 42 | 42 | 33 | M110×2 | 85 | 25 | 130 | 152 | JC32 | 831 | 1290 | 39.0 |
| | JB1010 | 6 | 120 | 240 | 170 | 218 | 168 | 35 | 87 | 125 | 45 | 43 | — | M110×2 | — | 25 | 145 | 164 | JC17 | 1020 | 1580 | 57.7 |
| | JB1240 | 7 | 120 | 240 | 160 | 193 | 168 | 31 | 80 | 113 | 38 | 40 | 38 | M110×2 | 85 | 27 | 128 | 169 | JC26 | 935 | 1420 | 51.1 |
| | JB1377 | 8 | 120 | 240 | 160 | 192 | 150 | 30 | 83 | 112 | 40 | 38 | — | M110×4 | — | — | 135 | 131 | 24RDC24160/192A | 935 | 1420 | 42.0 |






Design 7




Design 8

Sealed type tapered roller bearings for railway rolling stock axle journals (ABU bearing)


d 101.6 ~ 177.787 mm
110 ~ 130 mm

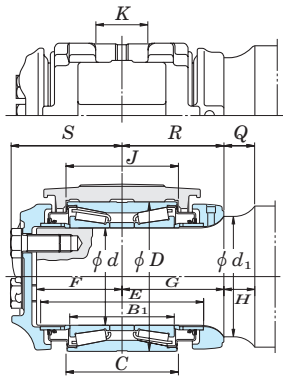

The shape of the backing ring used for JB1204P, JB1205P and JB1206P.



JB1486



JB1450

Dynamic equivalent load
(when $F_a/F_r \leq e$)
 $P = F_r + Y_2 F_a$
(when $F_a/F_r > e$)
 $P = 0.67 F_r + Y_3 F_a$
Static equivalent load
 $P_0 = F_r + Y_0 F_a$

| Class | Axle size | Unit No. | Boundary dimensions (mm) | | | | | | | | | | | Adapter No. | Dimensions of adapter (mm) | | | | | Bolt size | Dimensions (mm) p | Bearing No. | Basic load ratings (kN) | | Constant e | Axial load factors | | | (Refer.) Mass (kg) | | | |
|-------|-----------|----------|---------------------------|---------|----------------|---------|------------------------------|---------|-------|-------|-------|------|------|-------------|----------------------------|---------------------|-------|-------|-------|-----------|-------------------|-------------|-------------------------|-------------------------|------------|--------------------|----------------|----------------|--------------------|------|---------|------|
| | | | Brg. d Axle ¹⁾ | D | B ₁ | C | d ₁ ¹⁾ | E | F | G | H | Q | R | | S | J | K | L | M | | | | N | C _r | | C _{0r} | Y ₂ | Y ₃ | Y ₀ | Unit | Adapter | |
| B | 4 1/8x8 | JB1201 | 101.600 | 101.702 | 165.100 | 106.362 | 114.300 | 127.0 | 182.6 | 101.6 | 117.5 | 41.3 | 41.3 | 117.5 | 134.8 | JB701 | 117.5 | 68.3 | 165.9 | 124.6 | 101.6 | 3/4-10 UNC | 61.9 | HM120848/ HM120817XD | 402 | 769 | 0.26 | 2.55 | 3.80 | 2.50 | 17.3 | 3.8 |
| | | | 101.676 | 101.702 | 165.100 | 106.362 | 114.300 | 127.0 | 182.6 | 101.6 | 117.5 | 41.3 | 41.3 | 117.5 | 134.8 | JB701 | 117.5 | 68.3 | 165.9 | 124.6 | 101.6 | 3/4-10 UNC | 61.9 | HM120848/ HM120817XD | 402 | 769 | 0.26 | 2.55 | 3.80 | 2.50 | 17.3 | 3.8 |
| C | 5 x9 | JB1202 | 119.062 | 119.164 | 195.262 | 136.525 | 142.875 | 149.2 | 217.5 | 112.7 | 134.9 | 36.5 | 36.5 | 134.9 | 147.0 | JB702 | 146.0 | 74.6 | 196.1 | 143.7 | 117.5 | 7/8-9 UNC | 76.2 | HM124646/ HM124618XD | 626 | 1200 | 0.26 | 2.55 | 3.80 | 2.50 | 25.3 | 6.1 |
| D | 5 1/2x10 | JB1203 | 131.750 | 131.864 | 207.962 | 146.050 | 152.400 | 161.9 | 227.0 | 115.9 | 139.7 | 44.5 | 44.5 | 139.7 | 150.5 | JB703 | 155.6 | 74.6 | 208.8 | 156.4 | 123.8 | 7/8-9 UNC | 88.9 | HM127446/ HM127415XD | 641 | 1270 | 0.26 | 2.55 | 3.80 | 2.50 | 28.3 | 7.4 |
| E | 6 x11 | JB1204 | 144.450 | 144.564 | 220.662 | 155.575 | 163.512 | 177.8 | 241.3 | 127.0 | 150.8 | 46.0 | 46.0 | 150.8 | 164.1 | JB704 | 166.7 | 96.8 | 221.5 | 181.8 | 136.5 | 1-8 UNC | 98.4 | HM129848/ HM129814XD | 667 | 1380 | 0.26 | 2.55 | 3.80 | 2.50 | 34.3 | 10.8 |
| | | | 144.539 | 144.564 | 220.662 | 155.575 | 163.512 | 177.8 | 241.3 | 127.0 | 150.8 | 46.0 | 46.0 | 150.8 | 164.1 | JB704 | 166.7 | 96.8 | 221.5 | 181.8 | 136.5 | 1-8 UNC | 98.4 | HM129848/ HM129814XD | 667 | 1380 | 0.26 | 2.55 | 3.80 | 2.50 | 34.3 | 10.8 |
| F | 6 1/2x12 | JB1205 | 157.150 | 157.264 | 252.412 | 177.800 | 184.150 | 190.5 | 273.0 | 134.9 | 163.5 | 46.0 | 46.0 | 163.5 | 176.6 | JB705 | 187.3 | 96.8 | 253.2 | 194.5 | 152.4 | 1 1/8-7 UNC | 108.0 | HM133444/ HM133416XD | 910 | 1890 | 0.26 | 2.55 | 3.80 | 2.50 | 51.6 | 16.3 |
| | | | 157.239 | 157.264 | 252.412 | 177.800 | 184.150 | 190.5 | 273.0 | 134.9 | 163.5 | 46.0 | 46.0 | 163.5 | 176.6 | JB705 | 187.3 | 96.8 | 253.2 | 194.5 | 152.4 | 1 1/8-7 UNC | 108.0 | HM133444/ HM133416XD | 910 | 1890 | 0.26 | 2.55 | 3.80 | 2.50 | 51.6 | 16.3 |
| G | 7 x12 | JB1206P | 177.787 | 177.902 | 276.225 | 180.975 | 185.738 | 203.251 | 269.9 | 130.2 | 150.8 | 58.7 | 46.0 | 163.5 | 180.1 | JB706 ²⁾ | 189.7 | 181.0 | — | 279.4 | 168.3 | 1 1/4-7 UNC | 117.5 | HM136948/ HM136916XD | 1080 | 2220 | 0.26 | 2.55 | 3.80 | 2.50 | 59.2 | 23 |

| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|-----|--------|-----|---------|-----|-----|-----|---------|-----|-----|-----|----|----|-----|-------|---------------------|-----|------|-----|-------|-----|-----|----|------|-----|------|------|------|------|------|------|------|
| — | 110 | JB558 | 110 | 110.076 | 175 | 125 | 130 | 155 | 206 | 105 | 135 | 30 | 30 | 135 | 136.4 | JB558 | 134 | 70 | 175 | 135 | 110 | M22 | 75 | JT9 | 481 | 972 | 0.26 | 2.55 | 3.80 | 2.50 | 22.0 | 5.6 |
| — | | JB1486 | 110 | 110.059 | 205 | 130 | 140 | 150.068 | — | 85 | 105 | 53 | 43 | 115 | 118.4 | — | — | — | — | — | — | M22 | 75 | JT13 | 743 | 1220 | 0.26 | 2.55 | 3.80 | 2.50 | 27.3 | — |
| — | 120 | JB613 | 120 | 120.076 | 195 | 136 | 142 | 155 | 217 | 113 | 135 | 30 | 30 | 135 | 147.5 | JB613 | 146 | 74.5 | 196 | 142.5 | 118 | M22 | 75 | JT10 | 626 | 1200 | 0.26 | 2.55 | 3.80 | 2.50 | 27.0 | 6.2 |
| — | | JB1450 | 120 | 120.059 | 220 | 155 | 155 | 150.068 | — | 125 | 100 | 55 | 35 | 120 | 164.4 | — | — | — | — | — | — | M22 | 75 | JT12 | 907 | 1670 | 0.26 | 2.55 | 3.80 | 2.50 | 36.6 | — |
| — | 130 | JB633 | 130 | 130.076 | 208 | 146 | 152 | 165 | 227 | 139 | 139 | 26 | 26 | 139 | 149.2 | JB633 ²⁾ | 156 | 110 | 255 | 232 | 130 | M22 | 89 | JT11 | 641 | 1270 | 0.26 | 2.55 | 3.80 | 2.50 | 30.0 | 14.3 |




[Notes] 1) Upper figures : max. value ; lower : min. value

2) JB706 and JB633 indicate the specifications of wide adapters. Others indicate narrow adapters (shown in figures above).

Linear ball bearings

Linear ball bearings have an outer cylinder and a cage with three or more elliptic raceways inside. Balls are aligned on these raceways.

Ball complement
bore diameter (mm)
SDM series 6 – 120
SDMF, SDMK series 6 – 80
SDE series 5 – 80


| Standard type | Clearance adjustable type | Open type |
|--|--|---|
|  |  |  |
| Suitable for a wide range of applications and widely used in practice. The upper-class type is used for general purposes. The precision-class type is used when the bearing is required to be highly accurate. | The outer cylinder and side plate are slit axially so that the clearance between the bearing and shaft can be adjusted. Together with the use of a bore adjustable housing, a no-clearance state or light-preloaded state can be realized without fitting. | The outer cylinder and side plate each have a slit which is equivalent in size to a recirculating ball row raceway, so that the bearing does not interfere with a shaft strut during operation. This type is suitable for use with very long shafts. The bore diameter is adjustable. |

Flanged type



Can be fit quickly, and helps make equipment smaller and lighter in weight. Helps reduce cost.

Sealed type



One or both side(s) is/are sealed with special synthetic rubber so that foreign material cannot enter the bearing while the grease is kept from leaking. This sealing can be provided on all bearings of the standard, clearance adjustable, open, and flanged types.



Bearing numbering system

| Series code | Ball complement bore diameter number | Seal code | Shape code | Material code | Tolerance code |
|--------------------------------------|--------------------------------------|--|------------|---------------|----------------|
| SDM | 35 | UU | AJ | | |
| Series code | | SDM : metric series SDMF : metric series (flanged type) SDMK : metric series (flanged type) SDE : metric series (popular ones in europe) SDB : inch series | | | |
| Ball complement bore diameter number | Metric series | 35 : ball complement bore diameter 35 mm | | | |
| | Inch series | 4 : ball complement bore diameter 4/16 = 1/4 inch | | | |
| Seal code | | UU : both sides sealed U : single side sealed Not specified : not sealed | | | |
| Shape code | | Not specified : standard type AJ : clearance adjustable type OP : open type | | | |
| Material code | Outer cylinder and balls | Not specified : high carbon chrome bearing steel | | | |
| | Cage | Not specified : cold rolled steel sheet MG : synthetic resin | | | |
| Tolerance code | | Not specified : upper-class P : precision-class | | | |

■ **Linear ball bearing service life**

Linear ball bearing service life refers to the distance that the bearing travels until the outer cylinder, balls or shaft become damaged because of rolling contact fatigue from repeated stress.

The basic dynamic load rating refers to the magnitude of a constant load which makes a bearing's service life end after it travels a distance of 50 km.

The linear ball bearing service life and the basic dynamic load rating bear the relation shown below :

$$L = 50 \left(\frac{C}{P} \right)^3$$

where :

- L : service life km
- P : radial load on the bearing N
- C : bearing basic dynamic load rating N (refer to the specification table.)

Shaft surface hardness is closely related to running performance. In general, it is best for the hardness to be 60 thru 64 HRC.

If the hardness is 60 HRC or lower, the basic dynamic load rating (C) should be corrected by multiplying it by the appropriate hardness coefficient selected from Table 1.

| Shaft hardness HRC | Hardness coefficient f_H |
|--------------------|----------------------------|
| 60 | 1 |
| 59 | 0.97 |
| 57 | 0.88 |
| 55 | 0.76 |
| 53 | 0.64 |
| 51 | 0.52 |

● **Ball row arrangement and load rating**

The basic load ratings given in the specification table are those measured when a load is applied directly above a ball row (Q_1). When the load is applied between two ball rows, the load ratings become larger (Q_2). Table 2 lists the ratios of Q_2 ratings to Q_1 ratings.

| Number of ball rows | When a load is applied directly above a row (Q_1) | When a load is applied between two rows (Q_2) | Ratios of Q_2 to Q_1 |
|---------------------|---|---|--------------------------|
| 4 | | | 1.414 |
| 5 | | | 1.463 |
| 6 | | | 1.280 |

[Note] When there are only three rows, $Q_2 / Q_1 = 1$

■ **Recommended fits for linear ball bearings**

Table 3 lists the recommended fits for linear ball bearings.

When a bearing is mounted with a housing, the normal clearance fit should be selected. When the application is highly precise or special, the transition fit should be selected.

For the clearance adjustable and open type bearings, it is best for the shaft diameter to be smaller than the ball complement bore diameter lower deviation, and for the housing bore diameter to be larger than the bearing outside diameter upper deviation.

Table 3 Linear ball bearing recommended fits

| Bearing | Tolerance | Shaft tolerance class | | Housing bore tolerance class | |
|----------|-----------------|-----------------------|-----------------|------------------------------|----------------|
| | | Normal clearance | Close clearance | Clearance fit | Transition fit |
| SDM, SDB | Upper-class | f 6, g 6 | h 6 | H 7 | JS 7 (J 7) |
| | Precision-class | f 5, g 5 | h 5 | H 6 | JS 6 (J 6) |
| SDE | - | h 6 | js 6 (j 6) | H 7 | JS 7 (J 7) |

■ **Linear ball bearing clearance**

Linear ball bearings provide linear motion smoothly with little wear when the clearance is 0.003 to 0.012 mm. However, when clearance increase due to wear is considered critical, e.g. when the bearing is provided to press die sets, precision machine tools or precision testers; when the bearing becomes unable to slide because of moment; or when smooth bearing operation is needed with no clearance provided, the clearance is adjusted to zero or negative.

In such a case, shafts generally need to be mounted by "selective fitting."

They should be handled carefully so as not to be preloaded excessively.

As Fig. 1 shows, the clearance of bearings with numbers SDM 6 thru SDM 10 can be easily set to

zero or negative, by adjusting one of the three ball rows with a bolt.

Consult with JTEKT on the gauging of linear ball bearings and shafts which should be mounted by "selective fitting," as well as on the whole design of shafts.




Fig. 1 Clearance adjustment

Table 4 SDM series linear ball bearing tolerances

Unit : μm


| Bearing number SDM | Ball complement bore diameter (F_w) deviation | | | | Outside diameter (D) deviation | | Overall length (L) deviation | | B deviation | | Eccentricity | |
|--------------------|---|-------|-------------|-------|------------------------------------|-------|----------------------------------|-------|---------------|------|-----------------|-------------|
| | Precision-class | | Upper-class | | | | | | | | Precision-class | Upper-class |
| | upper | lower | upper | lower | upper | lower | upper | lower | max. | | | |
| 6, 8 | 0 | -6 | 0 | -9 | 0 | -11 | 0 | -200 | 0 | -200 | 8 | 12 |
| 10, 12, 13, 16 | 0 | -6 | 0 | -9 | 0 | -13 | 0 | -200 | 0 | -200 | 8 | 12 |
| 20 | 0 | -7 | 0 | -10 | 0 | -16 | 0 | -200 | 0 | -200 | 10 | 15 |
| 25, 30 | 0 | -7 | 0 | -10 | 0 | -16 | 0 | -300 | 0 | -300 | 10 | 15 |
| 35, 38, 40, 50 | 0 | -8 | 0 | -12 | 0 | -19 | 0 | -300 | 0 | -300 | 12 | 20 |
| 60 | 0 | -9 | 0 | -15 | 0 | -22 | 0 | -300 | 0 | -300 | 17 | 25 |
| 80 | 0 | -9 | 0 | -15 | 0 | -22 | 0 | -400 | 0 | -400 | 17 | 25 |
| 100, 120 | 0 | -10 | 0 | -20 | 0 | -25 | 0 | -400 | 0 | -400 | 20 | 30 |

Table 5 SDE series linear ball bearing tolerances

Unit : μm

| Bearing number SDE | Ball complement bore diameter (F_w) deviation | | Outside diameter (D) deviation | | Overall length (L) deviation | | B deviation | | Eccentricity |
|--------------------|---|-------|------------------------------------|-------|----------------------------------|-------|---------------|-------|--------------|
| | Precision-class | | Upper-class | | Precision-class | | Upper-class | | |
| | upper | lower | upper | lower | upper | lower | upper | lower | max. |
| 5, 8 | +8 | 0 | 0 | -8 | 0 | -200 | 0 | -200 | 12 |
| 10, 12 | +8 | 0 | 0 | -9 | 0 | -200 | 0 | -200 | 12 |
| 16 | +9 | -1 | 0 | -9 | 0 | -200 | 0 | -200 | 12 |
| 20 | +9 | -1 | 0 | -11 | 0 | -200 | 0 | -200 | 15 |
| 25, 30 | +11 | -1 | 0 | -11 | 0 | -300 | 0 | -300 | 15 |
| 40, 50 | +13 | -2 | 0 | -13 | 0 | -300 | 0 | -300 | 17 |
| 60 | +13 | -2 | 0 | -15 | 0 | -400 | 0 | -400 | 20 |
| 80 | +16 | -4 | 0 | -15 | 0 | -400 | 0 | -400 | 20 |

d 5 ~ (20) mm

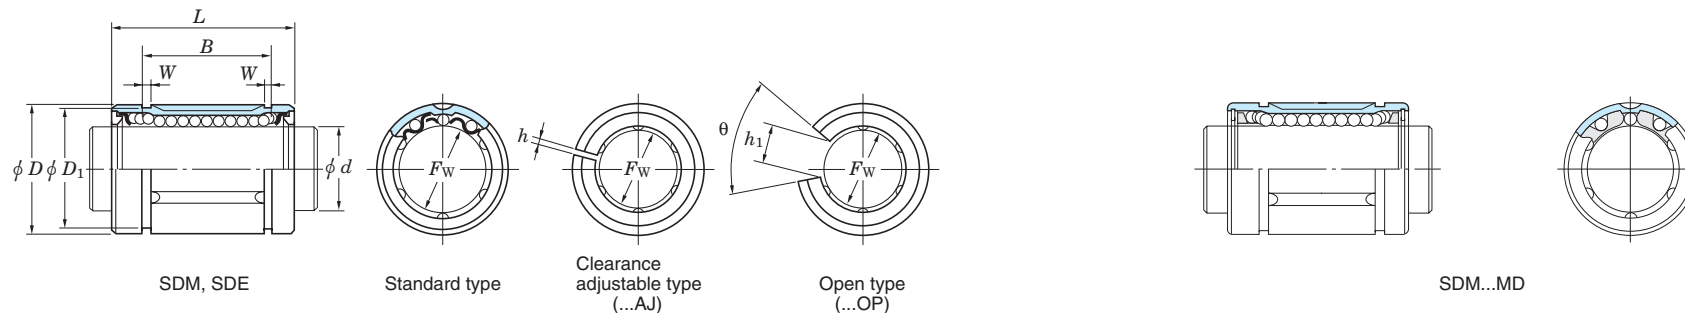


| Shaft dia. (mm) | Dimensions (mm) | | | | | | | | | Bearing No. ¹⁾ | | | No. of ball rows | | | Basic load ratings (N) | | (Refer.) Mass (g) | |
|--------------------|--------------------|----------------|----|----|------|-----|----------------|-----|----------------|---------------------------|---------------|---------------------------|------------------|---------------|---------------------------|---------------------------|----------------|-------------------------|---------------|
| | d | F _w | D | L | B | W | D ₁ | h | h ₁ | θ | Standard type | Clearance adjustable type | Open type | Standard type | Clearance adjustable type | Open type | C _r | C _{0r} | Standard type |
| 5 | 5 | 5 | 12 | 22 | 14.5 | 1.1 | 11.5 | — | — | — | SDE5 | — | — | 3 | — | — | 108 | 183 | 10 |
| 6 | 6 | 6 | 12 | 19 | 13.5 | 1.1 | 11.5 | 1 | — | — | SDM6 | SDM6AJ | — | 3 | 3 | — | 108 | 186 | 7 |
| | 6 | 6 | 12 | 19 | 13.5 | 1.1 | 11.5 | 1 | — | — | SDM6MG | SDM6AJMG | — | 4 | 4 | — | 108 | 186 | 6 |
| 8 | 8 | 8 | 15 | 17 | 11.5 | 1.1 | 14.3 | 1 | — | — | SDM8S | SDM8SAJ | — | 3 | 3 | — | 96 | 160 | 10 |
| | 8 | 8 | 15 | 17 | 11.5 | 1.1 | 14.3 | 1 | — | — | SDM8SMG | SDM8SAJMG | — | 4 | 4 | — | 96 | 160 | 9 |
| | 8 | 8 | 15 | 24 | 17.5 | 1.1 | 14.3 | 1 | — | — | SDM8 | SDM8AJ | — | 3 | 3 | — | 122 | 223 | 14 |
| | 8 | 8 | 15 | 24 | 17.5 | 1.1 | 14.3 | 1 | — | — | SDM8MG | SDM8AJMG | — | 4 | 4 | — | 134 | 255 | 13 |
| | 8 | 8 | 16 | 25 | 16.5 | 1.1 | 15.2 | 1 | — | — | SDE8 | SDE8AJ | — | 3 | 3 | — | 122 | 223 | 20 |
| | 8 | 8 | 16 | 25 | 16.5 | 1.1 | 15.2 | 1 | — | — | SDE8MG | SDE8AJMG | — | 4 | 4 | — | 134 | 255 | 18 |
| 10 | 10 | 10 | 19 | 29 | 22 | 1.3 | 18 | 1 | 6.8 | 80° | SDM10 | SDM10AJ | SDM10OP | 4 | 4 | 3 | 259 | 424 | 27 |
| | 10 | 10 | 19 | 29 | 22 | 1.3 | 18 | 1 | — | — | SDM10MG | SDM8AJMG | — | 4 | 4 | — | 259 | 424 | 23 |
| | 10 | 10 | 19 | 29 | 22 | 1.3 | 18 | 1 | 6.8 | 80° | SDE10 | SDE10AJ | SDE10OP | 4 | 4 | 3 | 259 | 424 | 27 |
| | 10 | 10 | 19 | 29 | 22 | 1.3 | 18 | 1 | — | — | SDE10MG | SDE10AJMG | — | 4 | 4 | — | 259 | 424 | 23 |
| 12 | 12 | 12 | 21 | 30 | 23 | 1.3 | 20 | 1.5 | 8 | 80° | SDM12 | SDM12AJ | SDM12OP | 4 | 4 | 3 | 260 | 431 | 31 |
| | 12 | 12 | 21 | 30 | 23 | 1.3 | 20 | 1.5 | — | — | SDM12MG | SDM12AJMG | — | 4 | 4 | — | 260 | 431 | 27 |
| | 12 | 12 | 22 | 32 | 22.9 | 1.3 | 21 | 1.5 | 7.5 | 78° | SDE12 | SDE12AJ | SDE12OP | 4 | 4 | 3 | 289 | 503 | 42 |
| | 12 | 12 | 22 | 32 | 22.9 | 1.3 | 21 | 1.5 | — | — | SDE12MG | SDM12AJMG | — | 4 | 4 | — | 289 | 503 | 37 |
| 13 | 13 | 13 | 23 | 32 | 23 | 1.3 | 22 | 1.5 | 9 | 80° | SDM13 | SDM13AJ | SDM13OP | 4 | 4 | 3 | 289 | 506 | 41 |
| | 13 | 13 | 23 | 32 | 23 | 1.3 | 22 | 1.5 | — | — | SDM13MG | SDM13AJMG | — | 4 | 4 | — | 289 | 506 | 35 |
| 16 | 16 | 16 | 26 | 36 | 24.9 | 1.3 | 24.9 | 1.5 | 10 | 78° | SDE16 | SDE16AJ | SDE16OP | 4 | 4 | 3 | 319 | 587 | 53 |
| | 16 | 16 | 26 | 36 | 24.9 | 1.3 | 24.9 | 1.5 | — | — | SDE16MG | SDE16AJMG | — | 4 | 4 | — | 319 | 587 | 47 |
| | 16 | 16 | 28 | 37 | 26.5 | 1.6 | 27 | 1.5 | 11 | 80° | SDM16 | SDM16AJ | SDM16OP | 4 | 4 | 3 | 480 | 766 | 69 |
| | 16 | 16 | 28 | 37 | 26.5 | 1.6 | 27 | 1.5 | — | — | SDM16MG | SDM16AJMG | — | 4 | 4 | — | 480 | 766 | 59 |
| 20 | 20 | 20 | 32 | 42 | 30.5 | 1.6 | 30.5 | 1.5 | 11 | 60° | SDM20 | SDM20AJ | SDM20OP | 5 | 5 | 4 | 590 | 1 010 | 92 |
| | 20 | 20 | 32 | 42 | 30.5 | 1.6 | 30.5 | 1.5 | — | — | SDM20MG | SDM20AJMG | — | 5 | 5 | — | 590 | 1 010 | 79 |

[Note] 1) JTEKT also manufactures sealed types, which are identified by U (one side sealed) or UU (both sides sealed) after ball complement bore diameter number.

Linear ball bearings


d (20) ~ 80 mm

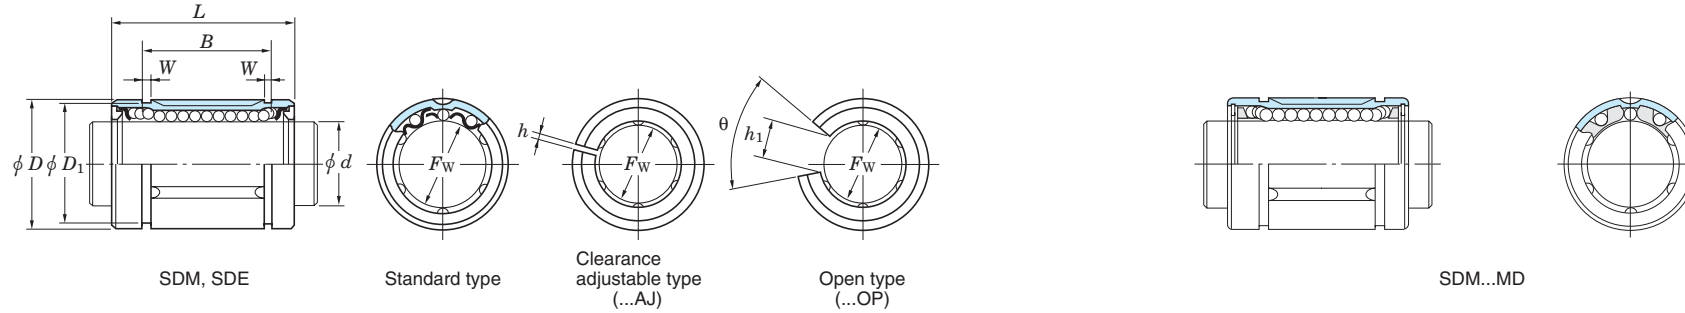

| Shaft dia. (mm) | Dimensions (mm) | | | | | | | | | Bearing No. ¹⁾ | | | No. of ball rows | | | Basic load ratings (N) | | (Refer.) Mass (g) |
|--------------------|--------------------|----------------|-----|-------|------|------|----------------|------|----------------|---------------------------|---------------|---------------------------|------------------|---------------|---------------------------|---------------------------|----------------|-------------------------|
| | d | F _w | D | L | B | W | D ₁ | h | h ₁ | θ | Standard type | Clearance adjustable type | Open type | Standard type | Clearance adjustable type | Open type | C _r | C _{0r} |
| 20 | 20 | 32 | 45 | 31.5 | 1.6 | 30.3 | 2 | 10 | 60° | SDE20 | SDE20AJ | SDE20OP | 5 | 5 | 4 | 590 | 1 010 | 96 |
| | 20 | 32 | 45 | 31.5 | 1.6 | 30.3 | 2 | — | — | SDE20MG | SDE20AJMG | — | 5 | 5 | — | 590 | 1 010 | 88 |
| 25 | 25 | 40 | 58 | 44.1 | 1.85 | 37.5 | 2 | 12.5 | 60° | SDE25 | SDE25AJ | SDE25OP | 5 | 5 | 4 | 1 130 | 2 030 | 190 |
| | 25 | 40 | 58 | 44.1 | 1.85 | 37.5 | 2 | — | — | SDE25MG | SDE25AJMG | — | 5 | 5 | — | 1 130 | 2 030 | 170 |
| | 25 | 40 | 59 | 41 | 1.85 | 38 | 2 | 12 | 60° | SDM25 | SDM25AJ | SDM25OP | 5 | 5 | 4 | 1 130 | 2 030 | 200 |
| | 25 | 40 | 59 | 41 | 1.85 | 38 | 2 | — | — | SDM25MG | SDM25AJMG | — | 5 | 5 | — | 1 130 | 2 030 | 170 |
| 30 | 30 | 45 | 64 | 44.5 | 1.85 | 43 | 2.5 | 15 | 50° | SDM30 | SDM30AJ | SDM30OP | 6 | 6 | 5 | 1 470 | 2 770 | 250 |
| | 30 | 45 | 64 | 44.5 | 1.85 | 43 | 2.5 | — | — | SDM30MG | SDM30AJMG | — | 6 | 6 | — | 1 470 | 2 770 | 220 |
| | 30 | 47 | 68 | 52.1 | 1.85 | 44.5 | 2 | 12.5 | 50° | SDE30 | SDE30AJ | SDE30OP | 6 | 6 | 5 | 1 470 | 2 770 | 340 |
| | 30 | 47 | 68 | 52.1 | 1.85 | 44.5 | 2 | — | — | SDE30MG | SDE30AJMG | — | 6 | 6 | — | 1 470 | 2 770 | 320 |
| 35 | 35 | 52 | 70 | 49.5 | 2.1 | 49 | 2.5 | 17 | 50° | SDM35 | SDM35AJ | SDM35OP | 6 | 6 | 5 | 1 580 | 3 070 | 370 |
| | 35 | 52 | 70 | 49.5 | 2.1 | 49 | 2.5 | — | — | SDM35MG | SDM35AJMG | — | 6 | 6 | — | 1 580 | 3 070 | 330 |
| 38 | 38 | 57 | 76 | 58.5 | 2.1 | 54.5 | 3 | 18 | 50° | SDM38 | SDM38AJ | SDM38OP | 6 | 6 | 5 | 2 020 | 3 600 | 490 |
| 40 | 40 | 60 | 80 | 60.5 | 2.1 | 57 | 3 | 20 | 50° | SDM40 | SDM40AJ | SDM40OP | 6 | 6 | 5 | 2 180 | 4 010 | 590 |
| | 40 | 60 | 80 | 60.5 | 2.1 | 57 | 3 | — | — | SDM40MG | SDM40AJMG | — | 6 | 6 | — | 2 180 | 4 010 | 530 |
| | 40 | 62 | 80 | 60.6 | 2.15 | 59 | 3 | 16.8 | 50° | SDE40 | SDE40AJ | SDE40OP | 6 | 6 | 5 | 2 180 | 4 010 | 710 |
| | 40 | 62 | 80 | 60.6 | 2.15 | 59 | 3 | — | — | SDE40MG | SDE40AJMG | — | 6 | 6 | — | 2 180 | 4 010 | 650 |
| 50 | 50 | 75 | 100 | 77.6 | 2.65 | 72 | 3 | 21 | 50° | SDE50 | SDE50AJ | SDE50OP | 6 | 6 | 5 | 4 020 | 7 110 | 1 050 |
| | 50 | 80 | 100 | 74 | 2.6 | 76.5 | 3 | 25 | 50° | SDM50 | SDM50AJ | SDM50OP | 6 | 6 | 5 | 4 420 | 7 150 | 1 500 |
| 60 | 60 | 90 | 110 | 85 | 3.15 | 86.5 | 3 | 30 | 50° | SDM60 | SDM60AJ | SDM60OP | 6 | 6 | 5 | 5 170 | 9 030 | 1 850 |
| | 60 | 90 | 125 | 101.7 | 3.15 | 86.5 | 3 | 27.2 | 54° | SDE60 | SDE60AJ | SDE60OP | 6 | 6 | 5 | 6 470 | 11 100 | 1 900 |
| 80 | 80 | 120 | 140 | 105.5 | 4.15 | 116 | 3 | 40 | 50° | SDM80 | SDM80AJ | SDM80OP | 6 | 6 | 5 | 8 180 | 12 800 | 4 200 |
| | 80 | 120 | 165 | 133.7 | 4.15 | 116 | 3 | 36.3 | 54° | SDE80 | SDE80AJ | SDE80OP | 6 | 6 | 5 | 8 890 | 14 500 | 4 800 |

[Note] 1) JTEKT also manufactures sealed types, which are identified by U (one side sealed) or UU (both sides sealed) after ball complement bore diameter number.

d 100 ~ 120 mm

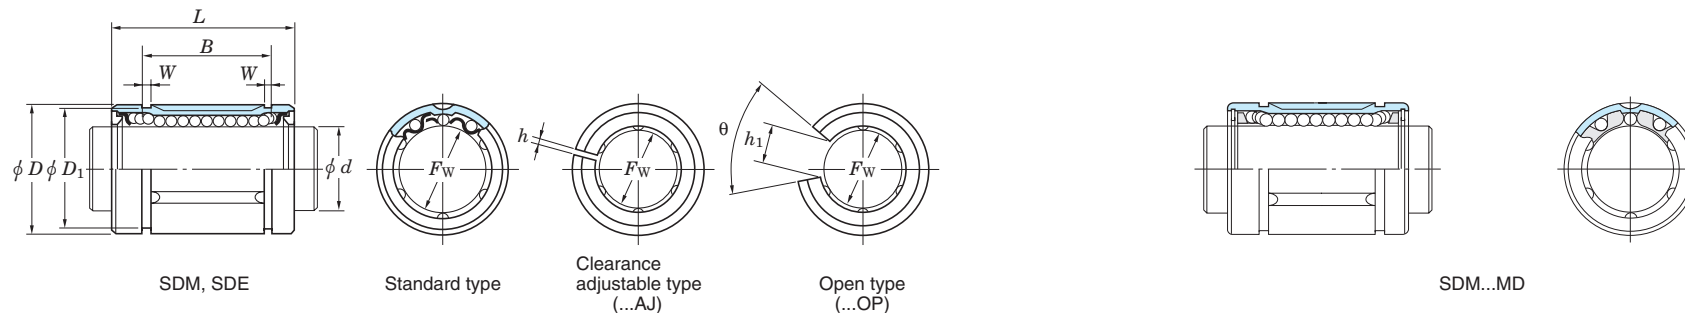


| Shaft dia. (mm) | Dimensions (mm) | | | | | | | | | Bearing No. ¹⁾ | | | No. of ball rows | | | Basic load ratings (N) | | (Refer.) Mass (g) Standard type |
|--------------------|--------------------|-------|-----|-------|------|-----|-------|-----|-------|---------------------------|-----------------|---------------------------|------------------|---------------|---------------------------|---------------------------|--------|--|
| | d | F_w | D | L | B | W | D_1 | h | h_1 | θ | Standard type | Clearance adjustable type | Open type | Standard type | Clearance adjustable type | Open type | C_r | |
| 100 | 100 | 150 | 175 | 125.5 | 4.15 | 145 | 3 | 50 | 50° | SDM100 | SDM100AJ | SDM100OP | 6 | 6 | 5 | 12 300 | 19 700 | 8 200 |
| 120 | 120 | 180 | 200 | 158.6 | 4.15 | 175 | 4 | 85 | 80° | SDM120 | SDM120AJ | SDM120OP | 8 | 8 | 6 | 22 300 | 39 100 | 15 500 |


[Note] 1) JTEKT also manufactures sealed types, which are identified by U (one side sealed) or UU (both sides sealed) after ball complement bore diameter number.

Linear ball bearings
flanged type


d 6 ~ 50 mm

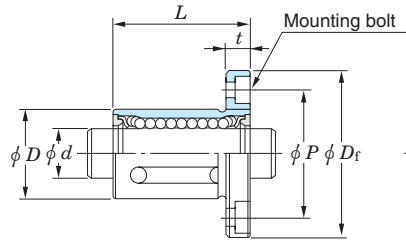


SDMF, SDMK




Round-flanged




Square-flanged



SDMF...MG
SDMK...MG (Synthetic resin)



Round-flanged




Square-flanged


| Shaft dia. (mm) <i>d</i> | Dimensions (mm) | | | | | | | Bolt size | Bearing No. | | No. of ball rows | Basic load ratings (N) | | (Refer.) Mass (g) Round-flanged type |
|--------------------------------|----------------------|----------|----------|----------------------|----------|----------|----------|--------------|-----------------------|------------------------|---------------------|---------------------------|-----------------------|---|
| | <i>F_w</i> | <i>D</i> | <i>L</i> | <i>D_f</i> | <i>K</i> | <i>t</i> | <i>P</i> | | Round-flanged type | Square-flanged type | | <i>C_r</i> | <i>C_{0r}</i> | |
| 6 | 6 | 12 | 19 | 28 | 22 | 5 | 20 | M3 | SDMF6 | SDMK6 | 3 | 108 | 186 | 23 |
| | 6 | 12 | 19 | 28 | 22 | 5 | 20 | M3 | SDMF6MG | SDMK6MG | | 4 | 108 | |
| 8 | 8 | 15 | 24 | 32 | 25 | 5 | 24 | M3 | SDMF8 | SDMK8 | 3 | 122 | 223 | 35 |
| | 8 | 15 | 24 | 32 | 25 | 5 | 24 | M3 | SDMF8MG | SDMK8MG | | 4 | 134 | |
| 10 | 10 | 19 | 29 | 40 | 30 | 6 | 29 | M4 | SDMF10 | SDMK10 | 4 | 259 | 424 | 65 |
| | 10 | 19 | 29 | 40 | 30 | 6 | 29 | M4 | SDMF10MG | SDMK10MG | | 4 | 259 | |
| 12 | 12 | 21 | 30 | 42 | 32 | 6 | 32 | M4 | SDMF12 | SDMK12 | 4 | 260 | 431 | 72 |
| | 12 | 21 | 30 | 42 | 32 | 6 | 32 | M4 | SDMF12MG | SDMK12MG | | 4 | 260 | |
| 13 | 13 | 23 | 32 | 43 | 34 | 6 | 33 | M4 | SDMF13 | SDMK13 | 4 | 289 | 506 | 83 |
| | 13 | 23 | 32 | 43 | 34 | 6 | 33 | M4 | SDMF13MG | SDMK13MG | | 4 | 289 | |
| 16 | 16 | 28 | 37 | 48 | 37 | 6 | 38 | M4 | SDMF16 | SDMK16 | 4 | 480 | 766 | 120 |
| | 16 | 28 | 37 | 48 | 37 | 6 | 38 | M4 | SDMF16MG | SDMK16MG | | 4 | 480 | |
| 20 | 20 | 32 | 42 | 54 | 42 | 8 | 43 | M5 | SDMF20 | SDMK20 | 5 | 590 | 1 010 | 170 |
| | 20 | 32 | 42 | 54 | 42 | 8 | 43 | M5 | SDMF20MG | SDMK20MG | | 5 | 590 | |
| 25 | 25 | 40 | 59 | 62 | 50 | 8 | 51 | M5 | SDMF25 | SDMK25 | 5 | 1 130 | 2 030 | 290 |
| | 25 | 40 | 59 | 62 | 50 | 8 | 51 | M5 | SDMF25MG | SDMK25MG | | 5 | 1 130 | |
| 30 | 30 | 45 | 64 | 74 | 58 | 10 | 60 | M6 | SDMF30 | SDMK30 | 6 | 1 470 | 2 770 | 440 |
| | 30 | 45 | 64 | 74 | 58 | 10 | 60 | M6 | SDMF30MG | SDMK30MG | | 6 | 1 470 | |
| 35 | 35 | 52 | 70 | 82 | 64 | 10 | 67 | M6 | SDMF35 | SDMK35 | 6 | 1 580 | 3 070 | 610 |
| | 35 | 52 | 70 | 82 | 64 | 10 | 67 | M6 | SDMF35MG | SDMK35MG | | 6 | 1 580 | |
| 40 | 40 | 60 | 80 | 96 | 75 | 13 | 78 | M8 | SDMF40 | SDMK40 | 6 | 2 180 | 4 010 | 1 000 |
| | 40 | 60 | 80 | 96 | 75 | 13 | 78 | M8 | SDMF40MG | SDMK40MG | | 6 | 2 180 | |
| 50 | 50 | 80 | 100 | 116 | 92 | 13 | 98 | M8 | SDMF50 | SDMK50 | 6 | 4 420 | 7 150 | 2 000 |

Linear ball bearings
flanged type


d 60 ~ 80 mm

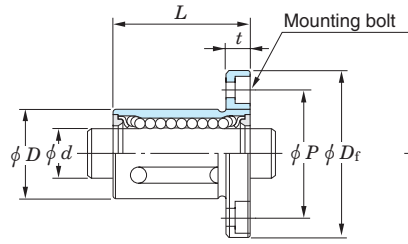


SDMF, SDMK




Round-flanged




Square-flanged



SDMF...MG
SDMK...MG (Synthetic resin)



Round-flanged



Square-flanged

| Shaft dia. (mm) | Dimensions (mm) | | | | | | | Bolt size | Bearing No. | | No. of ball rows | Basic load ratings (N) | | (Refer.) Mass (g) Round-flanged type |
|--------------------|--------------------|-----|-----|-------|-----|-----|-----|--------------|-----------------------|------------------------|---------------------|---------------------------|----------|---|
| | F_w | D | L | D_f | K | t | P | | Round-flanged type | Square-flanged type | | C_r | C_{0r} | |
| 60 | 60 | 90 | 110 | 134 | 106 | 18 | 112 | M10 | SDMF60 | SDMK60 | 6 | 5 170 | 9 030 | 2 800 |
| 80 | 80 | 120 | 140 | 164 | 136 | 18 | 142 | M10 | SDMF80 | SDMK80 | 6 | 8 180 | 12 800 | 5 400 |

Locknuts, lockwashers & lock plates

Bearings are often fit to a shaft with an adapter sleeve, locknut, lockwasher or lock plate.


These accessories make it easy to attach and remove bearings.

They are standardized in JIS.

- Locknuts are standardized such that they can be used with either adapter sleeves, withdrawal sleeves or shafts.
- Lockwashers and lock plates are used as locks on locknuts.

Lockwashers are used with bearings of bore diameter number 40 or lower. Lock plates are used with those of bore diameter 44 or higher.


Locknuts



AN (ANL) 02 - 100

HN (HNL) 41 - 110

Lockwashers and lock plates




AW (AWL) 00 - 40(X)

AL (ALL) 44 - 100



Locknuts
for adapter sleeves and shafts

AN02 ~ 25

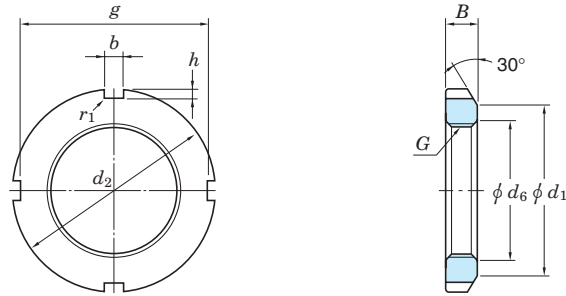

AN 26 ~ 40

ANL24 ~ 40

| Locknut No. | Thread size ¹⁾ G | Standard dimensions (mm) | | | | | | | | (Refer.) Mass (kg) | Applicable ²⁾ adapter sleeve (bore No.) | Applicable ³⁾ lockwasher No. |
|--------------|--------------------------------|--------------------------|----------------|-----|----------------|----|-----|----|---------------------|--------------------|--|---|
| | | d ₂ | d ₁ | g | d ₆ | b | h | B | r _{1 max.} | | | |
| AN 02 | M 15×1 | 25 | 21 | 21 | 15.5 | 4 | 2 | 5 | 0.4 | 0.010 | — | AW 02 |
| 03 | M 17×1 | 28 | 24 | 24 | 17.5 | 4 | 2 | 5 | 0.4 | 0.013 | — | 03 |
| 04 | M 20×1 | 32 | 26 | 28 | 20.5 | 4 | 2 | 6 | 0.4 | 0.019 | 04 | 04 |
| AN 05 | M 25×1.5 | 38 | 32 | 34 | 25.8 | 5 | 2 | 7 | 0.4 | 0.025 | 05 | AW 05 |
| 06 | M 30×1.5 | 45 | 38 | 41 | 30.8 | 5 | 2 | 7 | 0.4 | 0.043 | 06 | 06 |
| 07 | M 35×1.5 | 52 | 44 | 48 | 35.8 | 5 | 2 | 8 | 0.4 | 0.053 | 07 | 07 |
| AN 08 | M 40×1.5 | 58 | 50 | 53 | 40.8 | 6 | 2.5 | 9 | 0.5 | 0.085 | 08 | AW 08 |
| 09 | M 45×1.5 | 65 | 56 | 60 | 45.8 | 6 | 2.5 | 10 | 0.5 | 0.119 | 09 | 09 |
| 10 | M 50×1.5 | 70 | 61 | 65 | 50.8 | 6 | 2.5 | 11 | 0.5 | 0.148 | 10 | 10 |
| AN 11 | M 55×2 | 75 | 67 | 69 | 56 | 7 | 3 | 11 | 0.5 | 0.158 | 11 | AW 11 |
| 12 | M 60×2 | 80 | 73 | 74 | 61 | 7 | 3 | 11 | 0.5 | 0.174 | 12 | 12 |
| 13 | M 65×2 | 85 | 79 | 79 | 66 | 7 | 3 | 12 | 0.5 | 0.203 | 13 | 13 |
| AN 14 | M 70×2 | 92 | 85 | 85 | 71 | 8 | 3.5 | 12 | 0.5 | 0.242 | 14 | AW 14 |
| 15 | M 75×2 | 98 | 90 | 91 | 76 | 8 | 3.5 | 13 | 0.5 | 0.287 | 15 | 15 |
| 16 | M 80×2 | 105 | 95 | 98 | 81 | 8 | 3.5 | 15 | 0.6 | 0.397 | 16 | 16 |
| AN 17 | M 85×2 | 110 | 102 | 103 | 86 | 8 | 3.5 | 16 | 0.6 | 0.451 | 17 | AW 17 |
| 18 | M 90×2 | 120 | 108 | 112 | 91 | 10 | 4 | 16 | 0.6 | 0.556 | 18 | 18 |
| 19 | M 95×2 | 125 | 113 | 117 | 96 | 10 | 4 | 17 | 0.6 | 0.658 | 19 | 19 |
| AN 20 | M100×2 | 130 | 120 | 122 | 101 | 10 | 4 | 18 | 0.6 | 0.698 | 20 | AW 20 |
| 21 | M105×2 | 140 | 126 | 130 | 106 | 12 | 5 | 18 | 0.7 | 0.845 | 21 | 21 |
| 22 | M110×2 | 145 | 133 | 135 | 111 | 12 | 5 | 19 | 0.7 | 0.965 | 22 | 22 |
| AN 23 | M115×2 | 150 | 137 | 140 | 116 | 12 | 5 | 19 | 0.7 | 1.01 | — | AW 23 |
| 24 | M120×2 | 155 | 138 | 145 | 121 | 12 | 5 | 20 | 0.7 | 1.08 | 24 | 24 |
| 25 | M125×2 | 160 | 148 | 150 | 126 | 12 | 5 | 21 | 0.7 | 1.19 | — | 25 |

| Locknut No. | Thread size ¹⁾ G | Standard dimensions (mm) | | | | | | | | (Refer.) Mass (kg) | Applicable ²⁾ adapter sleeve (bore No.) | Applicable ³⁾ lockwasher No. |
|--------------|--------------------------------|--------------------------|----------------|-----|----------------|----|---|----|---------------------|--------------------|--|---|
| | | d ₂ | d ₁ | g | d ₆ | b | h | B | r _{1 max.} | | | |
| AN 26 | M130×2 | 165 | 149 | 155 | 131 | 12 | 5 | 21 | 0.7 | 1.25 | 26 | AW 26 |
| AN 27 | M135×2 | 175 | 160 | 163 | 136 | 14 | 6 | 22 | 0.7 | 1.55 | — | AW 27 |
| 28 | M140×2 | 180 | 160 | 168 | 141 | 14 | 6 | 22 | 0.7 | 1.56 | 28 | 28 |
| AN 29 | M145×2 | 190 | 172 | 178 | 146 | 14 | 6 | 24 | 0.7 | 1.80 | — | AW 29 |
| 30 | M150×2 | 195 | 171 | 183 | 151 | 14 | 6 | 24 | 0.7 | 2.03 | 30 | 30 |
| 31 | M155×3 | 200 | 182 | 186 | 156.5 | 16 | 7 | 25 | 0.7 | 2.30 | — | — |
| AN 32 | M160×3 | 210 | 182 | 196 | 161.5 | 16 | 7 | 25 | 0.7 | 2.59 | 32 | AW 32 |
| 33 | M165×3 | 210 | 193 | 196 | 166.5 | 16 | 7 | 26 | 0.7 | 2.70 | — | — |
| 34 | M170×3 | 220 | 193 | 206 | 171.5 | 16 | 7 | 26 | 0.7 | 2.80 | 34 | 34 |
| AN 36 | M180×3 | 230 | 203 | 214 | 181.5 | 18 | 8 | 27 | 0.7 | 3.07 | 36 | AW 36 |
| 38 | M190×3 | 240 | 214 | 224 | 191.5 | 18 | 8 | 28 | 0.7 | 3.39 | 38 | 38 |
| 40 | M200×3 | 250 | 226 | 234 | 201.5 | 18 | 8 | 29 | 0.7 | 3.69 | 40 | 40 |
| ANL24 | M120×2 | 145 | 133 | 135 | 121 | 12 | 5 | 20 | 0.7 | 0.78 | 24 | AWL24 |
| 26 | M130×2 | 155 | 143 | 145 | 131 | 12 | 5 | 21 | 0.7 | 0.88 | 26 | 26 |
| 28 | M140×2 | 165 | 151 | 153 | 141 | 14 | 6 | 22 | 0.7 | 0.99 | 28 | 28 |
| ANL30 | M150×2 | 180 | 164 | 168 | 151 | 14 | 6 | 24 | 0.7 | 1.33 | 30 | AWL30 |
| 32 | M160×3 | 190 | 174 | 176 | 161.5 | 16 | 7 | 25 | 0.7 | 1.56 | 32 | 32 |
| 34 | M170×3 | 200 | 184 | 186 | 171.5 | 16 | 7 | 26 | 0.7 | 1.72 | 34 | 34 |
| ANL36 | M180×3 | 210 | 192 | 194 | 181.5 | 18 | 8 | 27 | 0.7 | 1.95 | 36 | AWL36 |
| 38 | M190×3 | 220 | 202 | 204 | 191.5 | 18 | 8 | 28 | 0.7 | 2.08 | 38 | 38 |
| 40 | M200×3 | 240 | 218 | 224 | 201.5 | 18 | 8 | 29 | 0.7 | 2.98 | 40 | 40 |

[Notes] 1) Basic profile and dimension of screw thread are in accordance with JIS B 0205.


2) Applicable to adapter sleeve series A31, A2, A3 and A23.

3) Applicable to lockwashers with flat inner tongue.

[Remark] Locknut series AN is used for adapter assembly series H2, H3, H23 and H31, while locknut series ANL is used for adapter assembly series H30.

Locknuts
for adapter sleeves and shafts

AN 44 ~ 100
ANL 44 ~ 76

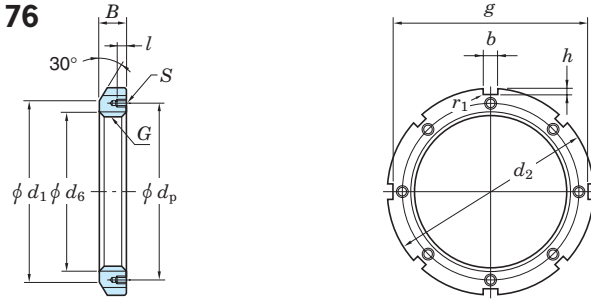

ANL 80 ~ 100



| Locknut No. | Thread ¹⁾ size G | Standard dimensions (mm) | | | | | | | Tapped hole ²⁾ (mm) S Thread size | | | (Refer.) Mass (kg) | Applicable adapter sleeve ³⁾ (bore No.) | Applicable lock plate No. | |
|--------------|-----------------------------------|--------------------------|----------------|-----|----------------|----|----|----|---|----|----------------|--------------------------|---|---------------------------------|-------|
| | | d ₂ | d ₁ | g | d ₆ | b | h | B | r ₁ max. | l | d _p | | | | |
| AN 44 | Tr220×4 | 280 | 250 | 260 | 222 | 20 | 10 | 32 | 0.8 | 15 | M 8×1.25 | 238 | 5.16 | 44 | AL 44 |
| 48 | Tr240×4 | 300 | 270 | 280 | 242 | 20 | 10 | 34 | 0.8 | 15 | M 8×1.25 | 258 | 5.91 | 48 | 44 |
| 52 | Tr260×4 | 330 | 300 | 306 | 262 | 24 | 12 | 36 | 0.8 | 18 | M10×1.5 | 281 | 7.99 | 52 | 52 |
| AN 56 | Tr280×4 | 350 | 320 | 326 | 282 | 24 | 12 | 38 | 0.8 | 18 | M10×1.5 | 301 | 8.99 | 56 | AL 52 |
| 60 | Tr300×4 | 380 | 340 | 356 | 302 | 24 | 12 | 40 | 0.8 | 18 | M10×1.5 | 326 | 11.7 | 60 | 60 |
| 64 | Tr320×5 | 400 | 360 | 376 | 322.5 | 24 | 12 | 42 | 0.8 | 18 | M10×1.5 | 345 | 13.0 | 64 | 64 |
| AN 68 | Tr340×5 | 440 | 400 | 410 | 342.5 | 28 | 15 | 55 | 1 | 21 | M12×1.75 | 372 | 23.0 | 68 | AL 68 |
| 72 | Tr360×5 | 460 | 420 | 430 | 362.5 | 28 | 15 | 58 | 1 | 21 | M12×1.75 | 392 | 25.0 | 72 | 68 |
| 76 | Tr380×5 | 490 | 450 | 454 | 382.5 | 32 | 18 | 60 | 1 | 21 | M12×1.75 | 414 | 30.8 | 76 | 76 |
| AN 80 | Tr400×5 | 520 | 470 | 484 | 402.5 | 32 | 18 | 62 | 1 | 27 | M16×2 | 439 | 36.7 | 80 | AL 80 |
| 84 | Tr420×5 | 540 | 490 | 504 | 422.5 | 32 | 18 | 70 | 1 | 27 | M16×2 | 459 | 43.3 | 84 | 80 |
| 88 | Tr440×5 | 560 | 510 | 520 | 442.5 | 36 | 20 | 70 | 1 | 27 | M16×2 | 477 | 45.1 | 88 | 88 |
| AN 92 | Tr460×5 | 580 | 540 | 540 | 462.5 | 36 | 20 | 75 | 1 | 27 | M16×2 | 497 | 50.2 | 92 | AL 88 |
| 96 | Tr480×5 | 620 | 560 | 580 | 482.5 | 36 | 20 | 75 | 1 | 27 | M16×2 | 527 | 62.0 | 96 | 96 |
| 100 | Tr500×5 | 630 | 580 | 584 | 502.5 | 40 | 23 | 80 | 1 | 27 | M16×2 | 539 | 63.1 | /500 | 100 |
| ANL44 | Tr220×4 | 260 | 242 | 242 | 222 | 20 | 9 | 30 | 0.8 | 12 | M 6×1 | 229 | 3.09 | 44 | ALL44 |
| 48 | Tr240×4 | 290 | 270 | 270 | 242 | 20 | 10 | 34 | 0.8 | 15 | M 8×1.25 | 253 | 5.16 | 48 | 48 |
| 52 | Tr260×4 | 310 | 290 | 290 | 262 | 20 | 10 | 34 | 0.8 | 15 | M 8×1.25 | 273 | 5.67 | 52 | 48 |
| ANL56 | Tr280×4 | 330 | 310 | 310 | 282 | 24 | 10 | 38 | 0.8 | 15 | M 8×1.25 | 293 | 6.78 | 56 | ALL56 |
| 60 | Tr300×4 | 360 | 336 | 336 | 302 | 24 | 12 | 42 | 0.8 | 15 | M 8×1.25 | 316 | 9.62 | 60 | 60 |
| 64 | Tr320×5 | 380 | 356 | 356 | 322.5 | 24 | 12 | 42 | 0.8 | 15 | M 8×1.25 | 335 | 9.94 | 64 | 64 |
| ANL68 | Tr340×5 | 400 | 376 | 376 | 342.5 | 24 | 12 | 45 | 1 | 15 | M 8×1.25 | 355 | 11.7 | 68 | ALL64 |
| 72 | Tr360×5 | 420 | 394 | 394 | 362.5 | 28 | 13 | 45 | 1 | 15 | M 8×1.25 | 374 | 12.0 | 72 | 72 |
| 76 | Tr380×5 | 450 | 422 | 422 | 382.5 | 28 | 14 | 48 | 1 | 18 | M10×1.5 | 398 | 14.9 | 76 | 76 |

| Locknut No. | Thread ¹⁾ size G | Standard dimensions (mm) | | | | | | | Tapped hole ²⁾ (mm) S Thread size | | | (Refer.) Mass (kg) | Applicable adapter sleeve ³⁾ (bore No.) | Applicable lock plate No. | |
|--------------|-----------------------------------|--------------------------|----------------|-----|----------------|----|----|----|---|----|----------------|--------------------------|---|---------------------------------|-------|
| | | d ₂ | d ₁ | g | d ₆ | b | h | B | r ₁ max. | l | d _p | | | | |
| ANL80 | Tr400×5 | 470 | 442 | 442 | 402.5 | 28 | 14 | 52 | 1 | 18 | M10×1.5 | 418 | 16.9 | 80 | ALL76 |
| 84 | Tr420×5 | 490 | 462 | 462 | 422.5 | 32 | 14 | 52 | 1 | 18 | M10×1.5 | 438 | 17.4 | 84 | 84 |
| 88 | Tr440×5 | 520 | 490 | 490 | 442.5 | 32 | 15 | 60 | 1 | 21 | M12×1.75 | 462 | 26.2 | 88 | 88 |
| ANL92 | Tr460×5 | 540 | 510 | 510 | 462.5 | 32 | 15 | 60 | 1 | 21 | M12×1.75 | 482 | 26.9 | 92 | ALL88 |
| 96 | Tr480×5 | 560 | 530 | 530 | 482.5 | 36 | 15 | 60 | 1 | 21 | M12×1.75 | 502 | 28.3 | 96 | 96 |
| 100 | Tr500×5 | 580 | 550 | 550 | 502.5 | 36 | 15 | 68 | 1 | 21 | M12×1.75 | 522 | 33.6 | /500 | 96 |

[Notes] 1) Basic profile and dimension of screw thread are in accordance with JIS B 0216.
2) Basic profile and dimension of bore with internal thread are in accordance with JIS B 0205.
3) Applicable to adapter sleeve series A31, A32, A23 and A30.

Locknuts
for withdrawal sleeves

HN 42 ~ 110
HNL 41 ~ 64



HNL 69 ~ 108

| Locknut No. | Thread ¹⁾ size G | Standard dimensions (mm) | | | | | | | | (Refer.) Mass (kg) | Withdrawal sleeve No. | | | |
|-------------|--------------------------------|--------------------------|----------------|-----|----------------|-------|----|----|---------------------|--------------------|-----------------------|--------|---------|--------|
| | | d ₂ | d ₁ | g | d ₆ | b | h | B | r _{1 max.} | | | | | |
| HN 42 | Tr210×4 | 270 | 238 | 250 | 212 | 20 | 10 | 30 | 0.8 | 4.75 | AH3138 | AH2238 | AH3238 | AH2338 |
| | 44 | Tr220×4 | 280 | 250 | 260 | 222 | 20 | 10 | 32 | 5.35 | 3140 | 2240 | 3240 | 2340 |
| | 48 | Tr240×4 | 300 | 270 | 280 | 242 | 20 | 10 | 34 | 6.20 | 3144 | 2244 | — | 2344 |
| HN 52 | Tr260×4 | 330 | 300 | 306 | 262 | 24 | 12 | 36 | 0.8 | 8.55 | AH3148 | AH2248 | — | AH2348 |
| | 58 | Tr290×4 | 370 | 330 | 346 | 292 | 24 | 12 | 40 | 11.8 | 3152 | 2252 | — | 2352 |
| | 62 | Tr310×5 | 390 | 350 | 366 | 312.5 | 24 | 12 | 42 | 13.4 | 3156 | 2256 | — | 2356 |
| HN 66 | Tr330×5 | 420 | 380 | 390 | 332.5 | 28 | 15 | 52 | 1 | 20.4 | AH3160 | AH2260 | AH3260 | — |
| | 70 | Tr350×5 | 450 | 410 | 420 | 352.5 | 28 | 15 | 55 | 25.2 | 3164 | 2264 | 3264 | — |
| | 74 | Tr370×5 | 470 | 430 | 440 | 372.5 | 28 | 15 | 58 | 28.2 | 3168 | — | 3268 | — |
| HN 80 | Tr400×5 | 520 | 470 | 484 | 402.5 | 32 | 18 | 62 | 1 | 40.0 | AH3172 | — | AH3272 | — |
| | 84 | Tr420×5 | 540 | 490 | 504 | 422.5 | 32 | 18 | 70 | 46.9 | 3176 | — | 3276 | — |
| | 88 | Tr440×5 | 560 | 510 | 520 | 442.5 | 36 | 20 | 70 | 48.5 | 3180 | — | 3280 | — |
| HN 92 | Tr460×5 | 580 | 540 | 540 | 462.5 | 36 | 20 | 75 | 1 | 55.0 | AH3184 | — | AH3284 | — |
| | 96 | Tr480×5 | 620 | 560 | 580 | 482.5 | 36 | 20 | 75 | 67.0 | X3188 | — | X3288 | — |
| | 102 | Tr510×6 | 650 | 590 | 604 | 513 | 40 | 23 | 80 | 75.0 | X3192 | — | X3292 | — |
| HN 106 | Tr530×6 | 670 | 610 | 624 | 533 | 40 | 23 | 80 | 1 | 78.0 | AHX3196 | — | AHX3296 | — |
| | 110 | Tr550×6 | 700 | 640 | 654 | 553 | 40 | 23 | 80 | 92.5 | X31/500 | — | X32/500 | — |



| Locknut No. | Thread ¹⁾ size G | Standard dimensions (mm) | | | | | | | | (Refer.) Mass (kg) | Withdrawal sleeve No. | | | |
|-------------|--------------------------------|--------------------------|----------------|-----|----------------|-------|----|----|---------------------|--------------------|-----------------------|---|---|---|
| | | d ₂ | d ₁ | g | d ₆ | b | h | B | r _{1 max.} | | | | | |
| HNL 69 | Tr345×5 | 410 | 384 | 384 | 347.5 | 28 | 13 | 45 | 1 | 11.5 | 3064 | — | — | — |
| | 73 | Tr365×5 | 430 | 404 | 404 | 367.5 | 28 | 13 | 48 | 14.2 | 3068 | — | — | — |
| HNL 77 | Tr385×5 | 450 | 422 | 422 | 387.5 | 28 | 14 | 48 | 1 | 15.0 | AH3072 | — | — | — |
| | 82 | Tr410×5 | 480 | 452 | 452 | 412.5 | 32 | 14 | 52 | 19.0 | 3076 | — | — | — |
| | 86 | Tr430×5 | 500 | 472 | 472 | 432.5 | 32 | 14 | 52 | 19.8 | 3080 | — | — | — |
| HNL 90 | Tr450×5 | 520 | 490 | 490 | 452.5 | 32 | 15 | 60 | 1 | 23.8 | AH3084 | — | — | — |
| | 94 | Tr470×5 | 540 | 510 | 510 | 472.5 | 32 | 15 | 60 | 25.0 | X3088 | — | — | — |
| | 98 | Tr490×5 | 580 | 550 | 550 | 492.5 | 36 | 15 | 60 | 34.0 | X3092 | — | — | — |
| HNL104 | Tr520×6 | 600 | 570 | 570 | 523 | 36 | 15 | 68 | 1 | 37.0 | AHX3096 | — | — | — |
| | 108 | Tr540×6 | 630 | 590 | 590 | 543 | 40 | 20 | 68 | 43.5 | X30/500 | — | — | — |

| | | | | | | | | | | | | | | | |
|--------|---------|---------|-----|-----|-------|-----|----|----|-----|------|--------|-------|-----|---|---|
| HNL 41 | Tr205×4 | 250 | 232 | 234 | 207 | 18 | 8 | 30 | 0.8 | 3.43 | AH3038 | AH238 | — | — | |
| | 43 | Tr215×4 | 260 | 242 | 242 | 217 | 20 | 9 | 30 | 0.8 | 3.72 | 3040 | 240 | — | — |
| | 47 | Tr235×4 | 280 | 262 | 262 | 237 | 20 | 9 | 34 | 0.8 | 4.60 | 3044 | 244 | — | — |
| HNL 52 | Tr260×4 | 310 | 290 | 290 | 262 | 20 | 10 | 34 | 0.8 | 5.80 | AH3048 | AH248 | — | — | |
| | 56 | Tr280×4 | 330 | 310 | 310 | 282 | 24 | 10 | 38 | 0.8 | 6.72 | 3052 | 252 | — | — |
| | 60 | Tr300×4 | 360 | 336 | 336 | 302 | 24 | 12 | 42 | 0.8 | 9.60 | 3056 | 256 | — | — |
| HNL 64 | Tr320×5 | 380 | 356 | 356 | 322.5 | 24 | 12 | 42 | 1 | 10.3 | AH3060 | — | — | — | |

[Note] 1) Basic profile and dimension of screw thread are in accordance with JIS B 0216.
[Remark] Number of slots on nut may sometimes exceed that shown in the figure.

Lockwashers

AW 00 ~ 24(X)



With bent inner tongue

With flat inner tongue

AW 25 ~ 40(X)

AWL 24 ~ 40(X)

| Lockwasher No. | Standard dimensions (mm) | | | | | | | | | | No. of tooth | (Refer.) Mass (kg/100pcs.) | Applicable adapter sleeve (bore No.) | Applicable locknut No. |
|----------------|--------------------------|------------------------|----------------|----|----------------|----------------|-----|----------------|----------------|----------------|--------------|----------------------------|--------------------------------------|------------------------|
| | With bent inner tongue | With flat inner tongue | d ₃ | M | f ₁ | B ₁ | f | d ₄ | d ₅ | r ₂ | | | | |
| AW 00 | AW 00X | 10 | 8.5 | 3 | 1 | 3 | 13 | 21 | 0.5 | 2 | 9 | 0.131 | — | AN 00 |
| 01 | 01X | 12 | 10.5 | 3 | 1 | 3 | 17 | 25 | 0.5 | 2 | 9 | 0.192 | — | 01 |
| 02 | 02X | 15 | 13.5 | 4 | 1 | 4 | 21 | 28 | 1 | 2.5 | 13 | 0.253 | — | 02 |
| AW 03 | AW 03X | 17 | 15.5 | 4 | 1 | 4 | 24 | 32 | 1 | 2.5 | 13 | 0.313 | — | AN 03 |
| 04 | 04X | 20 | 18.5 | 4 | 1 | 4 | 26 | 36 | 1 | 2.5 | 13 | 0.350 | 04 | 04 |
| 05 | 05X | 25 | 23 | 5 | 1.2 | 5 | 32 | 42 | 1 | 2.5 | 13 | 0.640 | 05 | 05 |
| AW 06 | AW 06X | 30 | 27.5 | 5 | 1.2 | 5 | 38 | 49 | 1 | 2.5 | 13 | 0.780 | 06 | AN 06 |
| 07 | 07X | 35 | 32.5 | 6 | 1.2 | 5 | 44 | 57 | 1 | 2.5 | 15 | 1.04 | 07 | 07 |
| 08 | 08X | 40 | 37.5 | 6 | 1.2 | 6 | 50 | 62 | 1 | 2.5 | 15 | 1.23 | 08 | 08 |
| AW 09 | AW 09X | 45 | 42.5 | 6 | 1.2 | 6 | 56 | 69 | 1 | 2.5 | 17 | 1.52 | 09 | AN 09 |
| 10 | 10X | 50 | 47.5 | 6 | 1.2 | 6 | 61 | 74 | 1 | 2.5 | 17 | 1.60 | 10 | 10 |
| 11 | 11X | 55 | 52.5 | 8 | 1.2 | 7 | 67 | 81 | 1 | 4 | 17 | 1.96 | 11 | 11 |
| AW 12 | AW 12X | 60 | 57.5 | 8 | 1.5 | 7 | 73 | 86 | 1.2 | 4 | 17 | 2.53 | 12 | AN 12 |
| 13 | 13X | 65 | 62.5 | 8 | 1.5 | 7 | 79 | 92 | 1.2 | 4 | 19 | 2.90 | 13 | 13 |
| 14 | 14X | 70 | 66.5 | 8 | 1.5 | 8 | 85 | 98 | 1.2 | 4 | 19 | 3.34 | 14 | 14 |
| AW 15 | AW 15X | 75 | 71.5 | 8 | 1.5 | 8 | 90 | 104 | 1.2 | 4 | 19 | 3.56 | 15 | AN 15 |
| 16 | 16X | 80 | 76.5 | 10 | 1.8 | 8 | 95 | 112 | 1.2 | 4 | 19 | 4.64 | 16 | 16 |
| 17 | 17X | 85 | 81.5 | 10 | 1.8 | 8 | 102 | 119 | 1.2 | 4 | 19 | 5.24 | 17 | 17 |
| AW 18 | AW 18X | 90 | 86.5 | 10 | 1.8 | 10 | 108 | 126 | 1.2 | 4 | 19 | 6.23 | 18 | AN 18 |
| 19 | 19X | 95 | 91.5 | 10 | 1.8 | 10 | 113 | 133 | 1.2 | 4 | 19 | 6.70 | 19 | 19 |
| 20 | 20X | 100 | 96.5 | 12 | 1.8 | 10 | 120 | 142 | 1.2 | 6 | 19 | 7.65 | 20 | 20 |
| AW 21 | AW 21X | 105 | 100.5 | 12 | 1.8 | 12 | 126 | 145 | 1.2 | 6 | 19 | 8.26 | 21 | AN 21 |
| 22 | 22X | 110 | 105.5 | 12 | 1.8 | 12 | 133 | 154 | 1.2 | 6 | 19 | 9.40 | 22 | 22 |
| 23 | 23X | 115 | 110.5 | 12 | 2 | 12 | 137 | 159 | 1.5 | 6 | 19 | 10.8 | — | 23 |
| AW 24 | AW 24X | 120 | 115 | 14 | 2 | 12 | 138 | 164 | 1.5 | 6 | 19 | 10.5 | 24 | AN 24 |

| Lockwasher No. | Standard dimensions (mm) | | | | | | | | | | No. of tooth | (Refer.) Mass (kg/100pcs.) | Applicable adapter sleeve (bore No.) | Applicable locknut No. |
|----------------|--------------------------|------------------------|----------------|----|----------------|----------------|-----|----------------|----------------|----------------|--------------|----------------------------|--------------------------------------|------------------------|
| | With bent inner tongue | With flat inner tongue | d ₃ | M | f ₁ | B ₁ | f | d ₄ | d ₅ | r ₂ | | | | |
| AW 25 | AW 25X | 125 | 120 | 14 | 2 | 12 | 148 | 170 | 1.5 | 6 | 19 | 11.8 | — | 25 |
| 26 | 26X | 130 | 125 | 14 | 2 | 12 | 149 | 175 | 1.5 | 6 | 19 | 11.3 | 26 | 26 |
| AW 27 | AW 27X | 135 | 130 | 14 | 2 | 14 | 160 | 185 | 1.5 | 6 | 19 | 14.4 | — | AN 27 |
| 28 | 28X | 140 | 135 | 16 | 2 | 14 | 160 | 192 | 1.5 | 8 | 19 | 14.2 | 28 | 28 |
| 29 | 29X | 145 | 140 | 16 | 2 | 14 | 172 | 202 | 1.5 | 8 | 19 | 16.8 | — | 29 |
| AW 30 | AW 30X | 150 | 145 | 16 | 2 | 14 | 171 | 205 | 1.5 | 8 | 19 | 15.5 | 30 | AN 30 |
| 31 | 31X | 155 | 147.5 | 16 | 2.5 | 16 | 182 | 212 | 1.5 | 8 | 19 | 20.9 | — | 31 |
| 32 | 32X | 160 | 154 | 18 | 2.5 | 16 | 182 | 217 | 1.5 | 8 | 19 | 22.2 | 32 | 32 |
| AW 33 | AW 33X | 165 | 157.5 | 18 | 2.5 | 16 | 193 | 222 | 1.5 | 8 | 19 | 24.1 | — | AN 33 |
| 34 | 34X | 170 | 164 | 18 | 2.5 | 16 | 193 | 232 | 1.5 | 8 | 19 | 24.7 | 34 | 34 |
| 36 | 36X | 180 | 174 | 20 | 2.5 | 18 | 203 | 242 | 1.5 | 8 | 19 | 26.8 | 36 | 36 |
| AW 38 | AW 38X | 190 | 184 | 20 | 2.5 | 18 | 214 | 252 | 1.5 | 8 | 19 | 27.8 | 38 | AN 38 |
| 40 | 40X | 200 | 194 | 20 | 2.5 | 18 | 226 | 262 | 1.5 | 8 | 19 | 29.3 | 40 | 40 |


| | | | | | | | | | | | | | | |
|--------------|---------------|-----|-----|----|-----|----|-----|-----|-----|---|----|------|----|-------|
| AWL24 | AWL24X | 120 | 115 | 14 | 2 | 12 | 133 | 155 | 1.5 | 6 | 19 | 7.70 | 24 | ANL24 |
| 26 | 26X | 130 | 125 | 14 | 2 | 12 | 143 | 165 | 1.5 | 6 | 19 | 8.70 | 26 | 26 |
| 28 | 28X | 140 | 135 | 16 | 2 | 14 | 151 | 175 | 1.5 | 8 | 19 | 10.9 | 28 | 28 |
| AWL30 | AWL30X | 150 | 145 | 16 | 2 | 14 | 164 | 190 | 1.5 | 8 | 19 | 11.3 | 30 | ANL30 |
| 32 | 32X | 160 | 154 | 18 | 2.5 | 16 | 174 | 200 | 1.5 | 8 | 19 | 16.2 | 32 | 32 |
| 34 | 34X | 170 | 164 | 18 | 2.5 | 16 | 184 | 210 | 1.5 | 8 | 19 | 19.0 | 34 | 34 |
| AWL36 | AWL36X | 180 | 174 | 20 | 2.5 | 18 | 192 | 220 | 1.5 | 8 | 19 | 18.0 | 36 | ANL36 |
| 38 | 38X | 190 | 184 | 20 | 2.5 | 18 | 202 | 230 | 1.5 | 8 | 19 | 20.5 | 38 | 38 |
| 40 | 40X | 200 | 194 | 20 | 2.5 | 18 | 218 | 250 | 1.5 | 8 | 19 | 21.4 | 40 | 40 |

[Remark] 1) AW00~AW40, AW00X~AW40X are applicable to adapter assembly series H31, H2, H3 and H23.
 2) AWL24~AWL40, AWL24X~AWL40X are applied to adapter assembly series H30.
 3) For adapter sleeves with narrow slits, lockwashers with flat inner tongue should be used. Either type of lockwasher can be used for adapter sleeves with wide slits.

Lock plates

AL 44 ~ 100

ALL 44 ~ 96

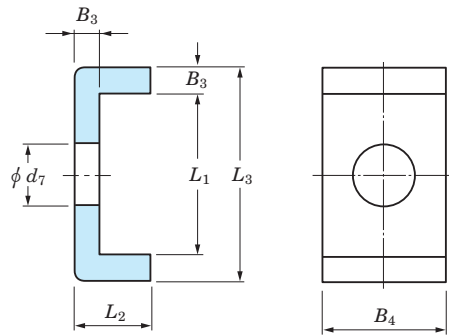

| Lock plate No. | Standard dimensions (mm) | | | | | | (Refer.) Mass (kg/100pcs.) | Applicable locknut No. |
|----------------|--------------------------|-------|-------|-------|-------|-------|----------------------------|------------------------|
| | B_3 | B_4 | L_2 | d_7 | L_1 | L_3 | | |
| AL 44 | 4 | 20 | 12 | 9 | 22.5 | 30.5 | 2.60 | AN 44,48 |
| 52 | 4 | 24 | 12 | 12 | 25.5 | 33.5 | 3.39 | 52,56 |
| 60 | 4 | 24 | 12 | 12 | 30.5 | 38.5 | 3.79 | 60 |
| AL 64 | 5 | 24 | 15 | 12 | 31 | 41 | 5.35 | AN 64 |
| 68 | 5 | 28 | 15 | 14 | 38 | 48 | 6.65 | 68,72 |
| 76 | 5 | 32 | 15 | 14 | 40 | 50 | 7.96 | 76 |
| AL 80 | 5 | 32 | 15 | 18 | 45 | 55 | 8.20 | AN 80,84 |
| 88 | 5 | 36 | 15 | 18 | 43 | 53 | 9.00 | 88,92 |
| 96 | 5 | 36 | 15 | 18 | 53 | 63 | 10.4 | 96 |
| 100 | 5 | 40 | 15 | 18 | 45 | 55 | 10.5 | 100 |
| ALL44 | 4 | 20 | 12 | 7 | 13.5 | 21.5 | 2.12 | ANL44 |
| 48 | 4 | 20 | 12 | 9 | 17.5 | 25.5 | 2.29 | 48,52 |
| 56 | 4 | 24 | 12 | 9 | 17.5 | 25.5 | 2.92 | 56 |
| ALL60 | 4 | 24 | 12 | 9 | 20.5 | 28.5 | 3.16 | ANL60 |
| 64 | 5 | 24 | 15 | 9 | 21 | 31 | 4.56 | 64,68 |
| 72 | 5 | 28 | 15 | 9 | 20 | 30 | 5.03 | 72 |
| ALL76 | 5 | 28 | 15 | 12 | 24 | 34 | 5.28 | ANL76,80 |
| 84 | 5 | 32 | 15 | 12 | 24 | 34 | 6.11 | 84 |
| 88 | 5 | 32 | 15 | 14 | 28 | 38 | 6.45 | 88,92 |
| 96 | 5 | 36 | 15 | 14 | 28 | 38 | 7.29 | 96,100 |

[Remark] Lock plate series AL are applicable to adapter assembly series H31, H32 and H23, while lock plate series ALL are applicable to H30.

Exsev&Ceramic bearing series

More and more bearings are being used in extreme special environments, such as in a vacuum, or in a clean, corrosive, or heated place. In some cases bearings are required to be insulated or antimagnetic.

Applications of bearings in such environments are increasing in the field of state-of-the-art technology, e.g. vacuum equipment, aerospace equipment and semi-conductor production facilities. Bearings made of conventional materials and lubricants can hardly meet these new needs.

JTEKT has succeeded in developing a series of bearings for use in extreme special environments, having started from the study of the very basics of materials and testing of their performance under various severe conditions.


JTEKT has standardized the following bearings as the "JTEKT **EXSEV** bearing series".

- Exsev bearings for use in a clean environment
Designed for use in a vacuum.
The friction surface of the bearing interior is coated with solid lubricant (or soft metal). Bearings pre-lubricated with special grease are also available.
- Exsev bearings for use in a vacuum environment
Produce insignificant contamination, provided with rolling elements and a cage made of self-lubricating materials. Optimal for use in environments which need to be clean.
- Ceramic bearings
Ceramic rings and rolling elements (silicon nitride Si_3N_4) ensure excellent performance in various extreme special environments.


Exsev bearings for use in a vacuum environment




Exsev bearings for use in a clean environment



Ceramic bearings



Linear ball bearings for vacuum



For details, refer to JTEKT separate catalog "**EXSEV** bearings and Ceramic bearings for extreme special environments" (CAT. NO. BA004EN).



Bearings for machine tool spindles (for support of axial loading)

JTEKT supplies double direction angular contact thrust ball bearings and ACT type matched pair angular contact ball bearings which are used with machine tool spindles to support axial loading.


These bearings were developed to meet needs which have grown as machine tool spindle rotation has become faster and more accurate.

Several dimension series are available for selection according to operating conditions.

Double direction angular contact thrust ball bearings



Matched pair angular contact ball bearing (ACT type)

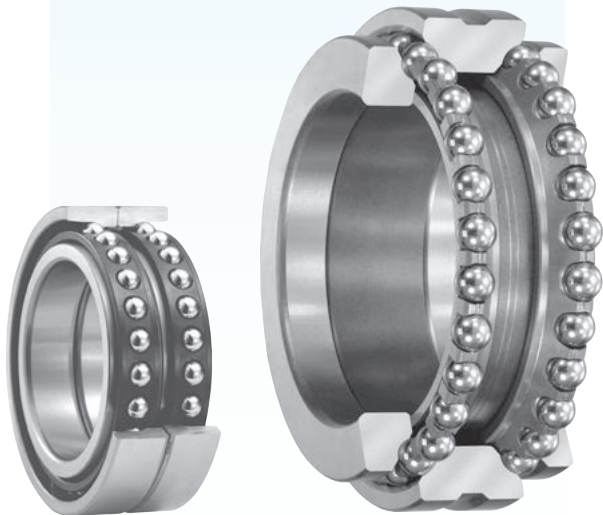


For details, refer to JTEKT separate catalog "Precision Ball and Roller Bearings for Machine Tools" (CAT. NO. B2005E).




Precision ball screw support bearings and bearing units


Support bearings



Support bearing units




■ Support bearings were developed to support precision ball screw shafts. They have the same structure as angular contact thrust ball bearings with a contact angle of 60°.



- Have a large axial load carrying capacity. Also able to carry a certain degree of radial load.
- Highly rigid in the axial direction.
- Starting torque is small.

■ Support bearing units consist of the bearings described above and a precisely processed housing. Units with a JTEKT precision ball screw are also available.

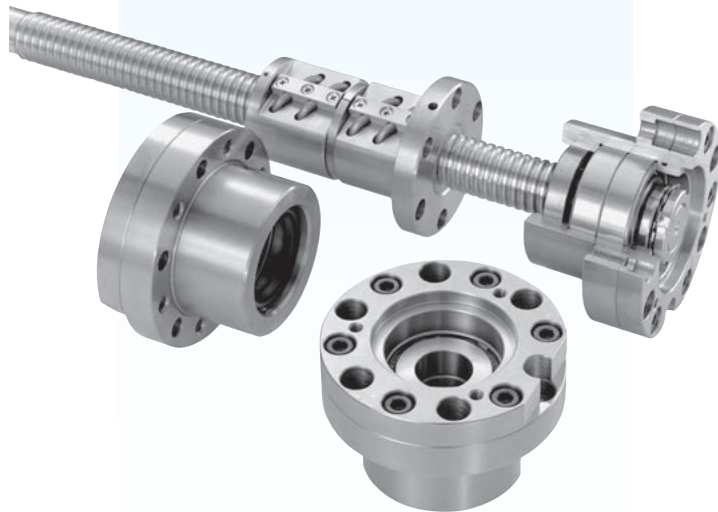

For details, refer to JTEKT separate catalog "Precision Ball and Roller Bearings for Machine Tools" (CAT. NO. B2005E).




Full complement type cylindrical roller bearings for crane sheaves

Crane rope sheaves and running wheels which are operated at low or medium speed are generally equipped with full complement type cylindrical roller bearings because the operation of these machines involves heavy, impact loading.

These bearings are divided into shielded and open types. The shielded type is often used with the outer ring rotation.

Shielded type



Open type




■ Shielded type

- The shielded type was developed for use with rope sheaves. It is shielded, non-separable and pre-lubricated with grease.
- Bearings with locating snap rings around the outer ring can be positioned and fit to sheaves with ease.
- The bearing surface is coated with phosphate for rust prevention.

■ Open type

- Open type bearings are further divided into those used on the fixed side and those used on the free side. The former carry axial load in both directions. The relative position of the latter's inner ring and outer ring can be adjusted by moving them along the axis.
- Open type bearings are separable because the outer ring divided into two annular pieces in a plane perpendicular to its axis. Triple-row and four-row bearings are available along with double-row types.

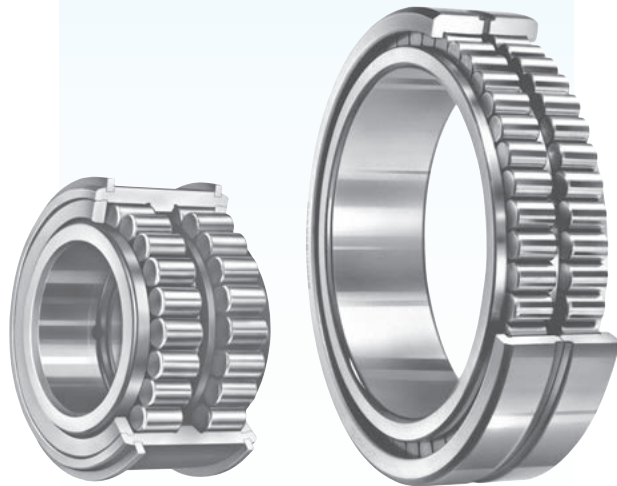

For details, refer to JTEKT separate catalog "Large size ball & roller bearings" (CAT. NO. BS008EN).



Rolling mill roll neck bearings

Rolling mill roll neck four-row cylindrical roller bearings and tapered roller bearings are designed to achieve the maximum load rating capacity in a limited space.

- Four-row cylindrical roller bearings
 - Suitable for high-speed rotation. Thin section designs are also available.
 - The inner ring raceway surface and the roll can be finished simultaneously after the inner ring is mounted on the roll neck. This feature is useful in improving rolling mill accuracy.


- Four-row tapered roller bearings
 - Suitable for low- and medium-speed rotation. Available in both metric and inch series.
 - The internal clearance is preadjusted, facilitating mounting.
 - More sealed type four-row tapered roller bearings are being used currently.

Four-row cylindrical roller bearings




Cylindrical bore


Four-row tapered roller bearings



Open type



Sealed type

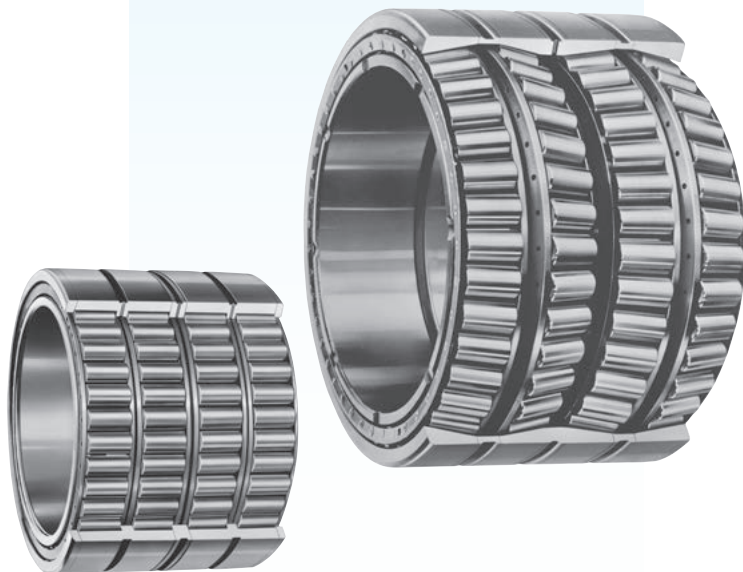

For details, refer to JTEKT separate catalog "Roll neck bearings for rolling mill" (CAT. NO. B2013E).

